

Investor's Guide Business Part

Notes:

- This material is composed mainly of basic contents to promote understanding of Yaskawa for analysts and investors.
- Figures in this document are rounded off and may differ from those in other documents such as financial results.
- The copyright to all materials in this document is held by YASKAWA Electric Corporation. No part of this document may be reproduced or distributed without the prior permission of the copyright holder.

YASKAWA ELECTRIC CORPORATION
(TSE6506)

1. Motion Control

1-1. AC servo & controller

1-2. Drives

2. Robotics

3. System Engineering

1. Motion Control



Product Basics


- Motion control product includes “AC servo & controller” and “AC drive.”
- Main difference is subjects and types of control.

	AC servo & controller	AC drive
Subject of control	Position and speed of motor-driven machines 	Rotational speed of motors 
Features	• Move exactly and steadily to the commanded position and speed	• Provide smooth and stable movement by freely changing the speed of rotation • Contribute to energy saving by adjusting the speed of rotation and reducing wasted power consumption
Range of use	Narrow : Field where high speed and precision are required	Wide : Life related, industrial equipment, etc.
Application	 Machine tool  Semiconductor production equipment  Industrial robots	 Elevator  Air conditioning fan  Conveyor

Revenue / Operating Profit (Motion Control)

■ Revenue ■ Operating profit — Operating profit ratio

(Billions of Yen)

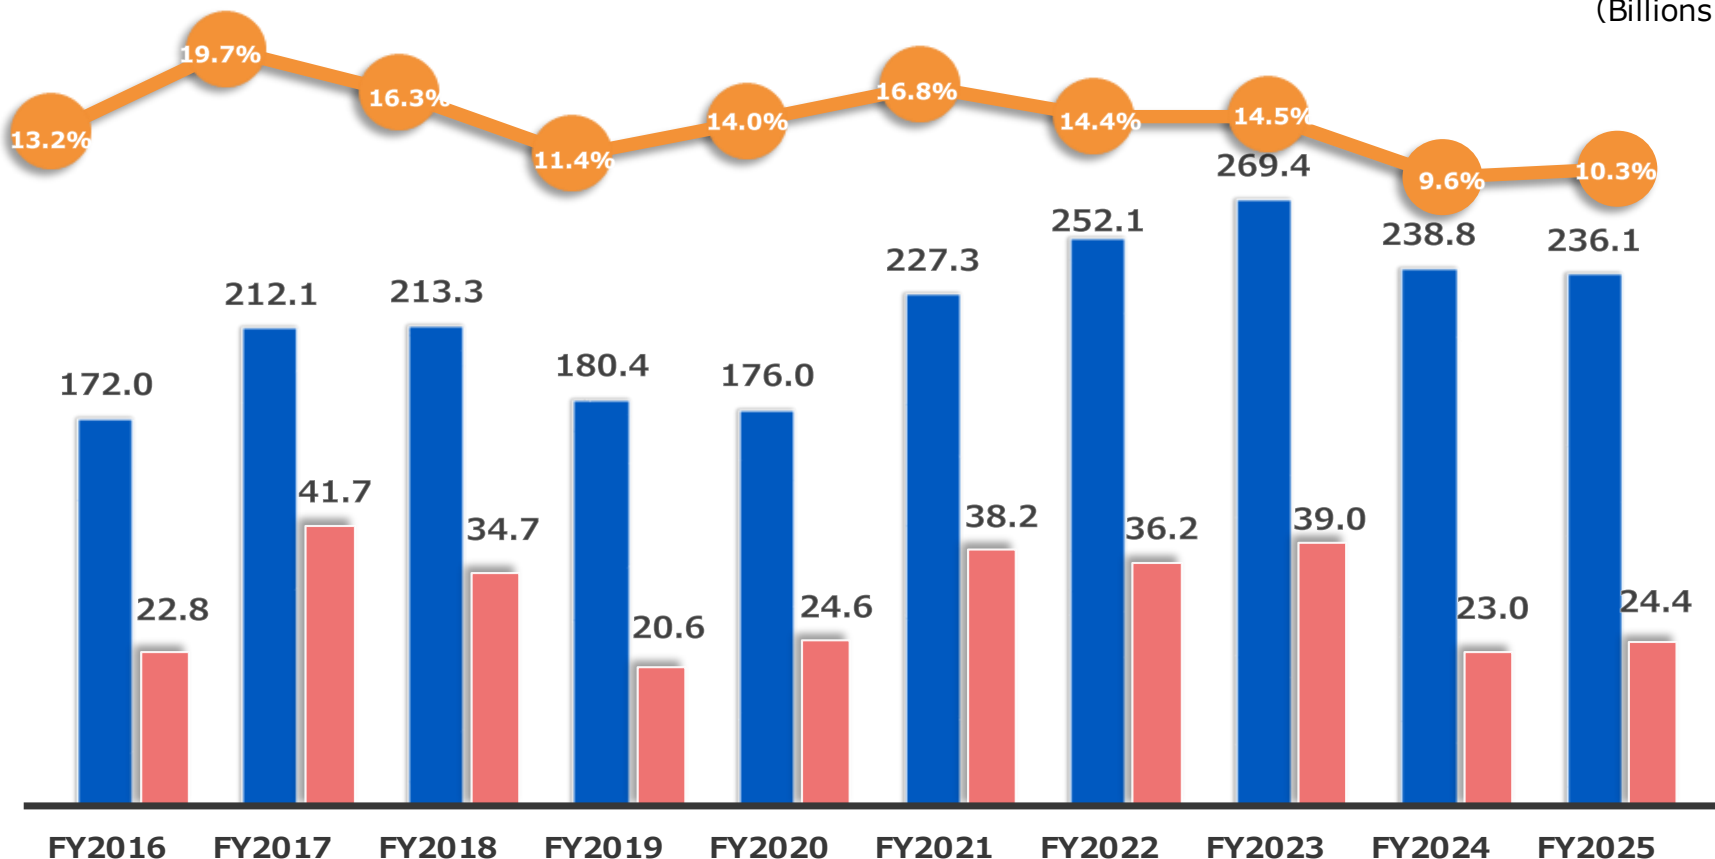

Note1: Data up to FY2017 are based on Japanese GAAP.

Note2: The Company changed its accounting period starting FY2017 from March 20 to the last day of February. As a transitional year for this change, FY2017 was from March 21, 2017 to February 28, 2018.

Note3: Revisions were made to the division of businesses segments starting FY2017. The PV inverter business, which was previously included in Motion Control, is included in System Engineering. Figures and profit ratios of each segment for FY2016 reflect this change. The change is not applied to figures and profit ratios for the period up until FY2015.

Note4: Revisions were made to the division of businesses segments starting FY2020. The high voltage AC drives, which was previously included in System Engineering, is included in Motion Control. Figures and profit ratios of each segment for FY2019 reflect this change. The change is not applied to figures and profit ratios for the period up until FY2018.

Note5: From FY2024, we revised the segment classification of PV inverter, which had been included in the System Engineering segment, to be included in the Motion Control segment. Figures for FY2023 are also presented based on the revised information.


1-1. AC servo & controller



Product Basics (1/3)

What is an AC servo drive?

An automatic controller consisting of a servo amplifier and a servo motor that follows the target level indicated by the controller

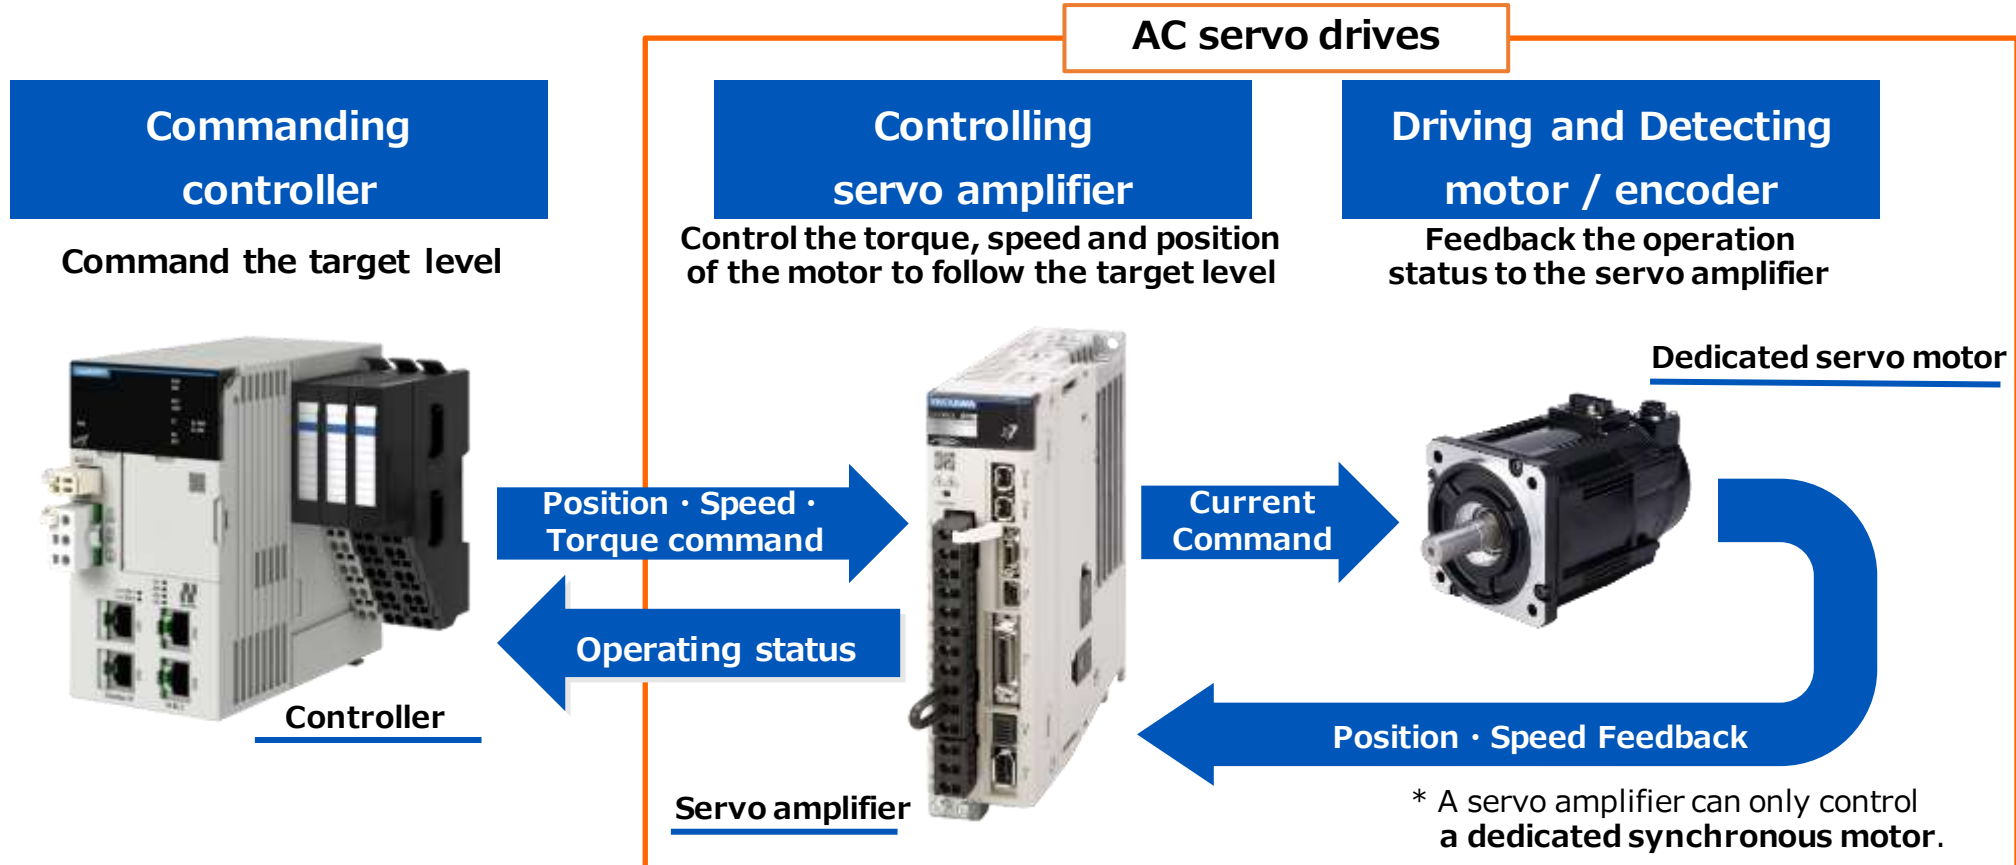

The purpose is to improve equipment performance and stabilize quality through highly accurate position, speed and torque control.


Product Basics (2/3)

What is a controller?

A control equipment that controls AC servo drives, AC drives, and robots, etc.

Input

Push buttons, sensors, cameras, etc.

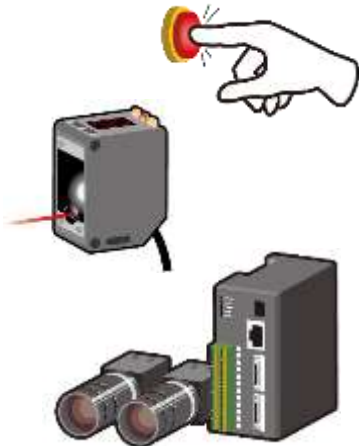

Processing program

Input information and control output



Controller (MP Series)

Output

AC servo drives, AC drives, robots etc.




The purpose is to improve productivity through highly accurate control

Product Basics (3/3)

Flowchart of machine controller (MP Series)

Receive signals from touch panels to control AC servo drives, AC drives, and robots, etc.

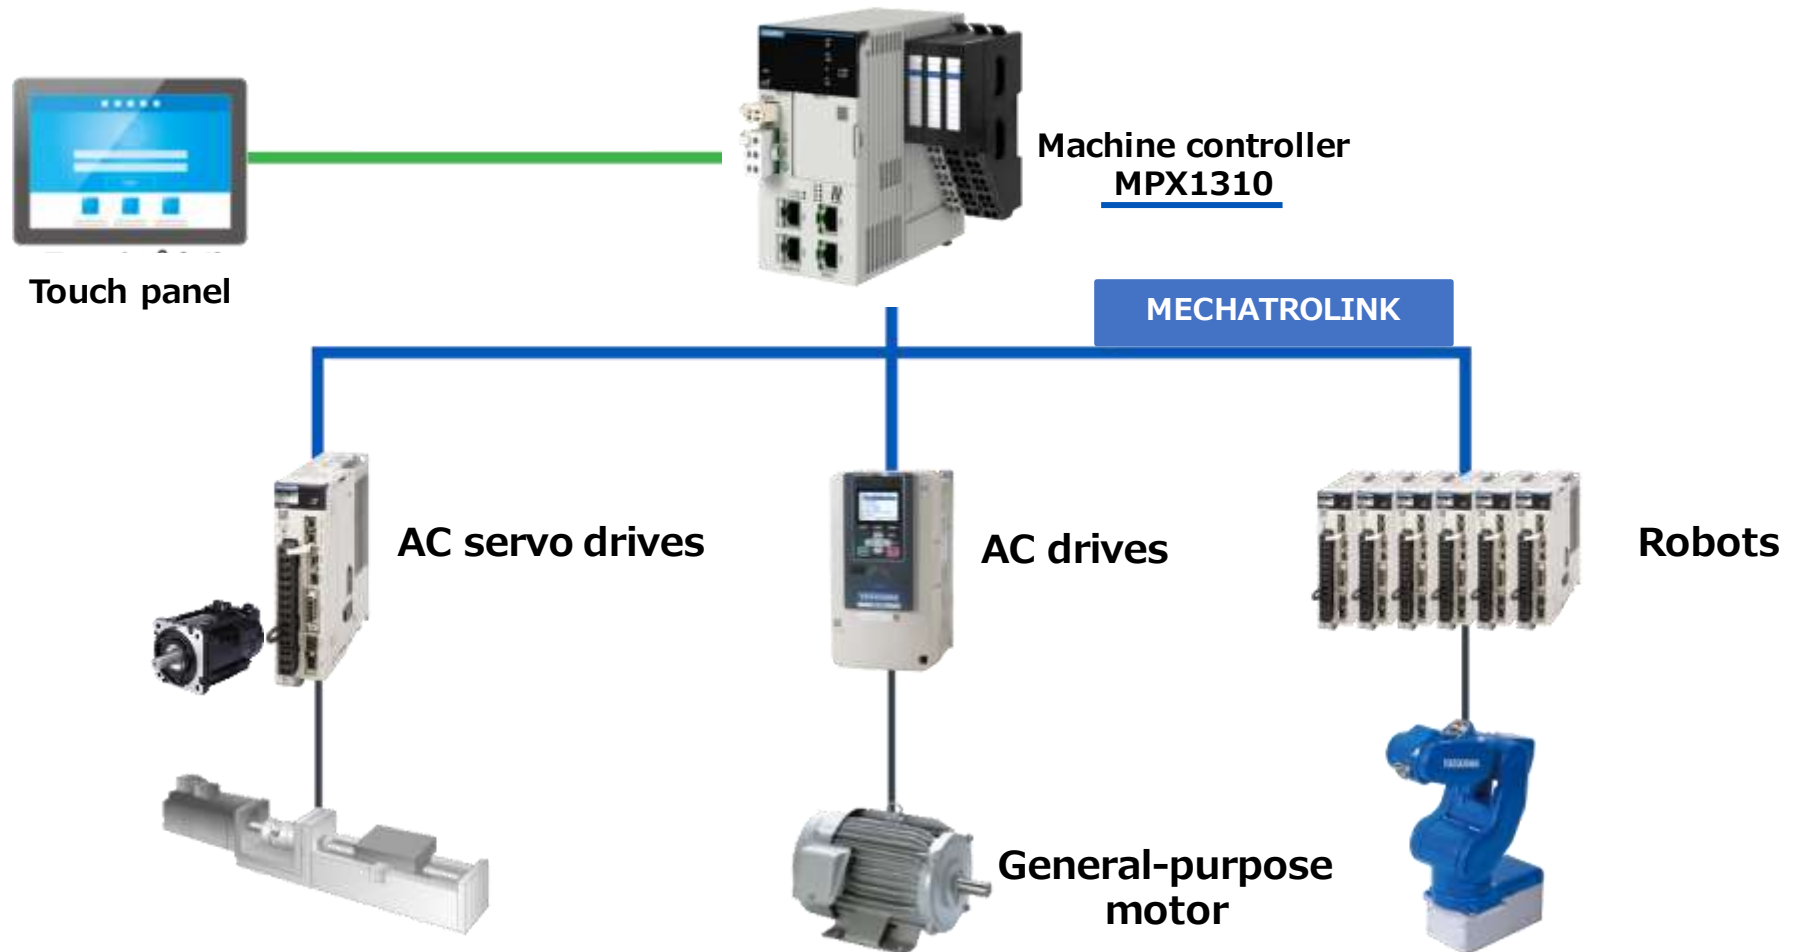


Applications and Market

Machines for semiconductor, LCD & electronic component

- Semiconductor manufacturing equipment
- LCD manufacturing equipment
- Secondary battery manufacturing apparatus
- Electronic component processing and assembly equipment



AC servo motor

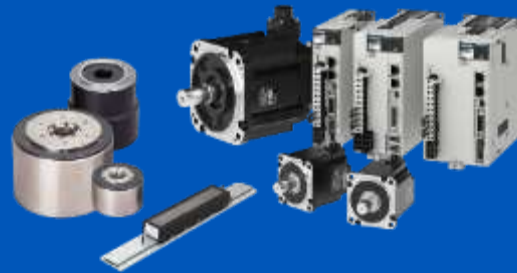

Supports motion control for various applications

General industrial machines

- Metal processing machine
- Wood processing machine
- Resin molding machine
- Food processing machine
- Packaging and filling machine
- Logistics and transportation equipment
- Medical equipment
- Printing machine
- Textile machine
- Papermaking



Machine tools

- NC lathe
- Machining center
- Milling machine
- Grinder













Robots

- Industrial robot
- Clean transfer robot
- Vacuum transfer robot




Product Lineup

Wide lineup to accommodate to various applications


Controller	iCube Control					MIRAMOTION	
	 YRM1000 Series YRM Controller	 MPX1000 Series Machine Controller	 SLIO I/O Series I/O Products	 MP3000 Series Machine Controller Board type Modular type etc..	 MP2000 Series Machine Controller Board type Modular type etc..	 Galvano controller  2D  3D Galvano scanner	
Network	MECHATROLINK (MECHATROLINK-4, MECHATROLINK-III etc..) other Field Network						
AC Servo Drives	 Σ-X Series  SERVOPACKs Σ-XS model Single-axis AC200V/400V 50W to 15kW  Rotary Servomotors SGMXA model Low inertia, high-speed 50W to 7.0kW  Σ-XW model Two-axis AC200V 200W to 1.0kW  Rotary Servomotors SGMXJ model Medium inertia, high-speed 50W to 750W  Σ-XT model Three-axis AC200V 200W to 400W  Rotary Servomotors SGMXG model Medium inertia, high torque 300W to 15kW  Rotary Servomotors SGMXP model Medium inertia, flat type 100W to 1.5kW		 Σ-7 Series  SERVOPACKs Σ-7S model Single-axis AC100V/200V 11W to 15kW  Rotary Servomotors SGM7M model Low inertia, ultra-small capacity 3.3W to 33W  Direct Drive Servomotors SGM7E model Coreless, Inner Rotor 2N·m to 35N·m  SGM7F model With Core, Inner Rotor Small capacity 2N·m to 35N·m Medium capacity 45N·m to 200N·m  SGM7D model With Core, Outer Rotor 1.3N·m to 240N·m  Σ-7W model Two-axis AC200V 200W to 1.0kW  Rotary Servomotors SGM7J model Medium inertia, high-speed 50W to 750W  SGM7A model Low inertia, high-speed 50 to 7.0kW  SGM7P model Medium inertia, flat type 100W to 1.5kW  SGM7G model Medium inertia, large torque 300W to 15kW		 Linear Servomotors SGLG model Coreless 12.5N to 750N  SGLFW2 model With core F 45N to 2520N  SGLTW model With core T 130N to 2000N		 Large-capacity Σ-V Series  SERVOPACKs SGDV model 22kW to 55kW  Rotary Servomotors SGMV model Large capacity, Low inertia 22kW to 55kW

Revenue Breakdown by Region and Application, Market Share

Breakdown of revenue by region

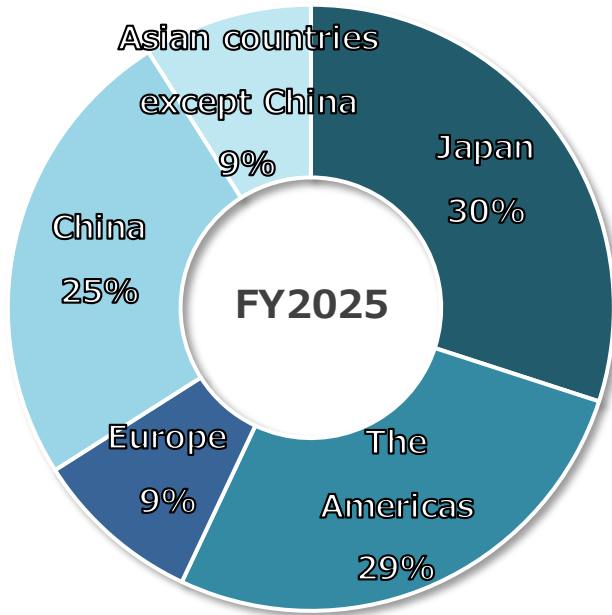


Revenue breakdown by application

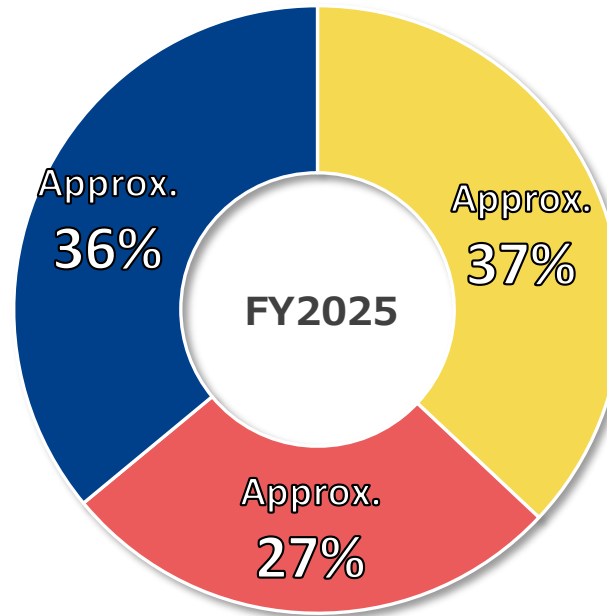

- Electronics-related industries including semiconductor, FPD and electronic components
- Machinery-related industries including machine tool, metal processing, press machine and robots
- Other (Packaging, textile, injection molding, etc.)

Market share

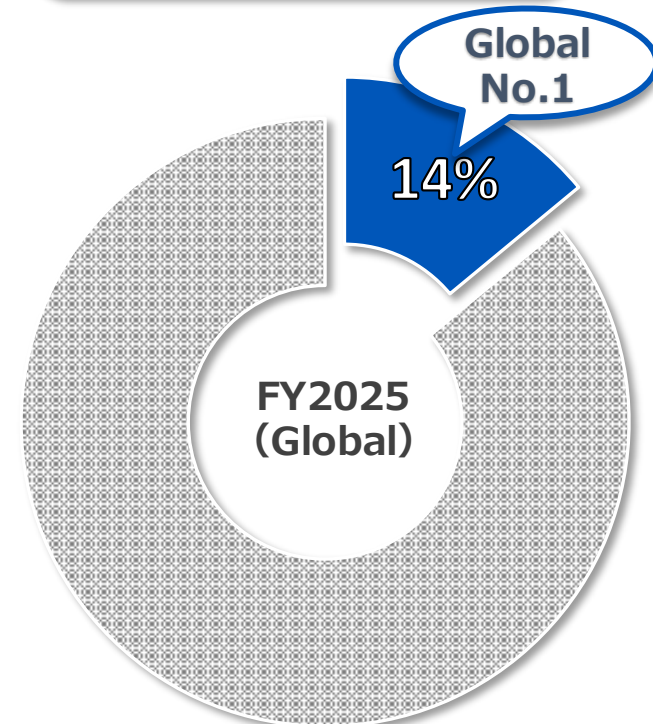


[Note] Company estimate

Total Shipment

(10 Thousand Units/Year)

(10 Thousand Units/G.TTL)

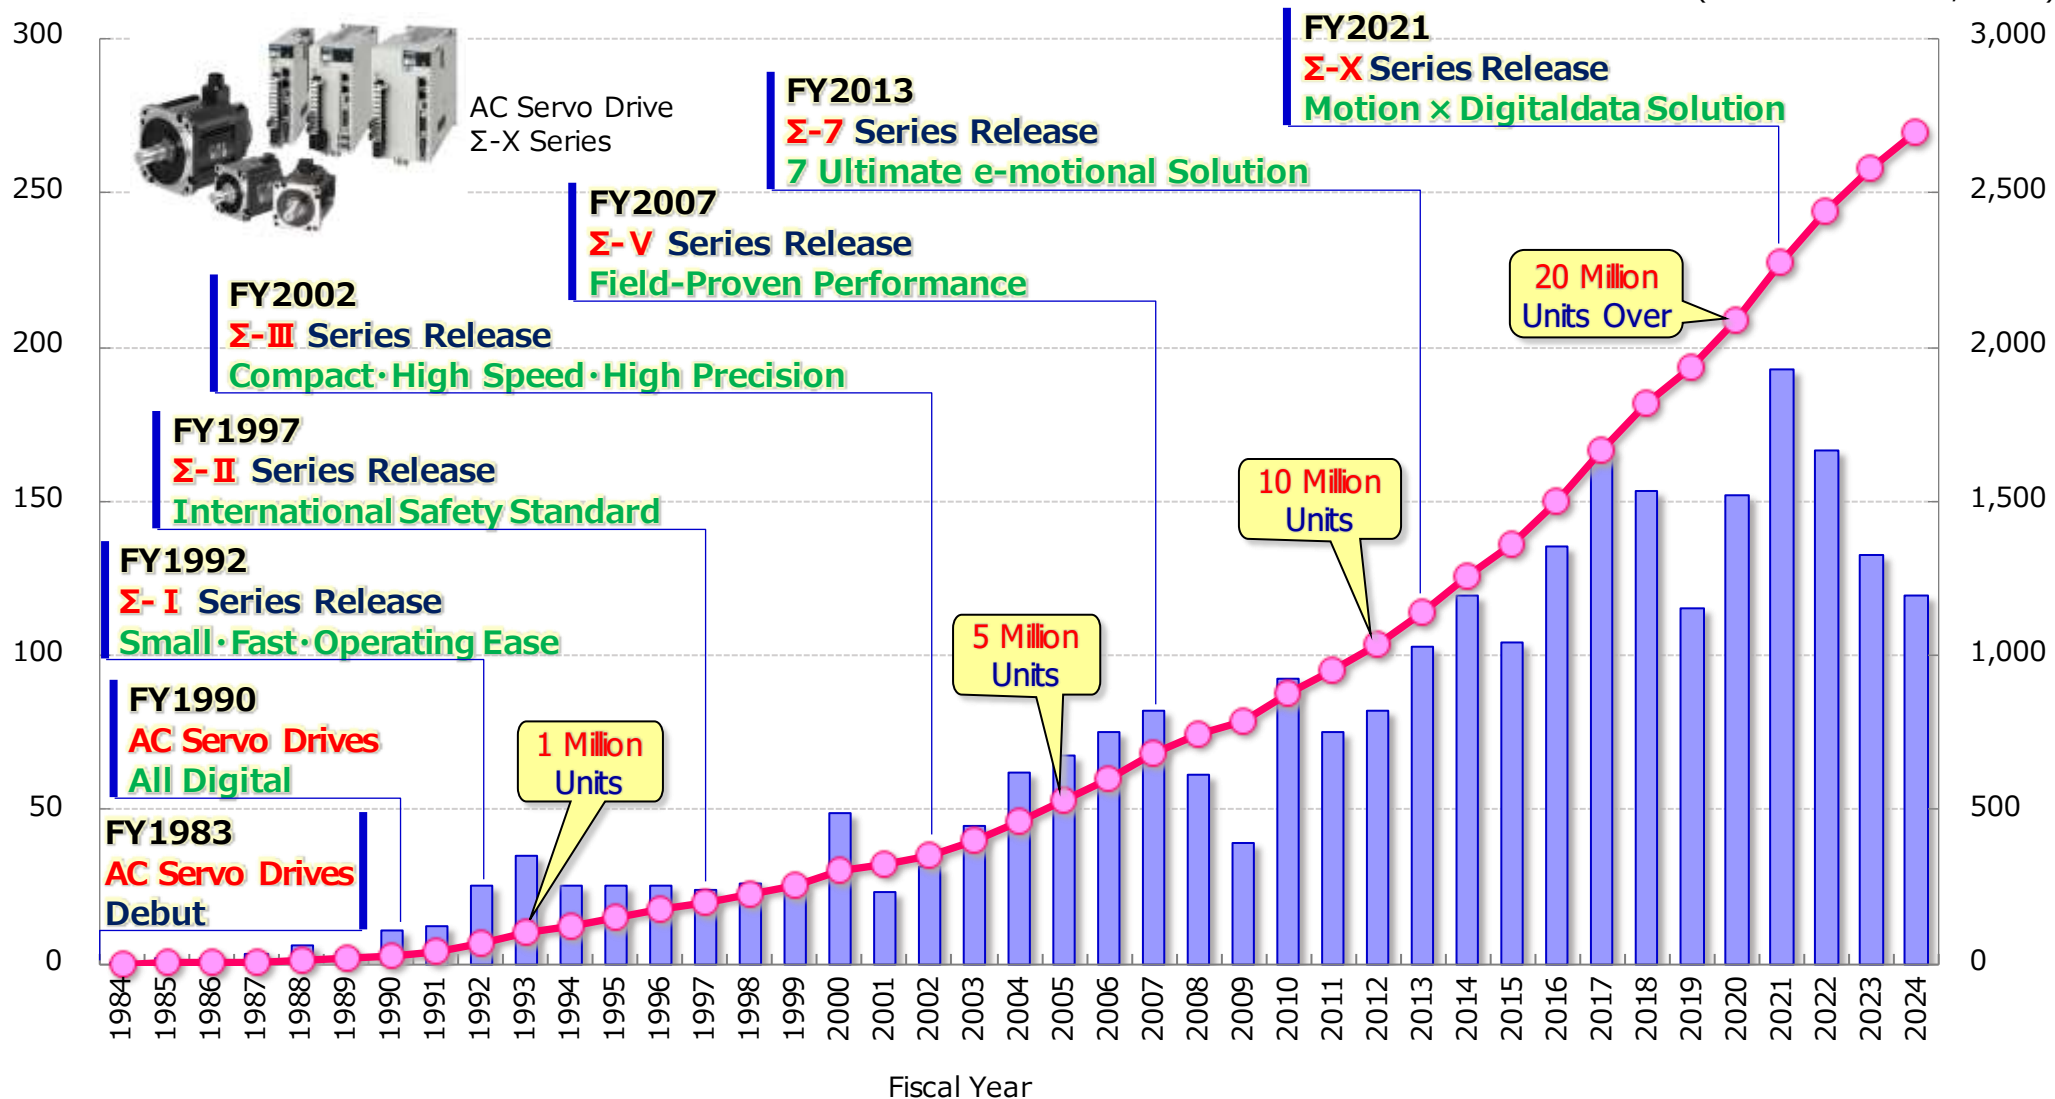

New Product Features (1/3)

Features of Σ -X Series

Maximum motor rotation speed

The maximum rotation speed of the motor has increased from the earlier value of $6,000 \text{ min}^{-1}$ to $7,000 \text{ min}^{-1}$.



Applicable models:


All SGMXJ and SGMXA models

Equipped with a high-resolution 26-bit encoder

The resolution* of the encoder has been increased to 26 bits, four times that of the earlier model. 24 bits of encoder resolution is position precision resolving 1 revolution of a motor to 67 million pulses


Earlier model

Encoder resolution 24 bits
 $\approx 16 \text{ million pulses/rev}$



Σ -X

Encoder resolution 26 bits
 $\approx 67 \text{ million pulses/rev}$




Four times
that of
the earlier
model

Increased position resolution/stop precision
→ Precise stops

*Ability to measure how finely a motor rotation can be split


Speed frequency response

Speed frequency response has changed from 3.1 kHz for the earlier model to 3.5 kHz. Maximizing the following performance for the speed reference improves equipment productivity.



Improved control precision and smoothness

Smoother drive is possible from a more effective speed ripple compensation algorithm for cogging compensation. This helps reduce inconsistency in equipment machining precision and quality.

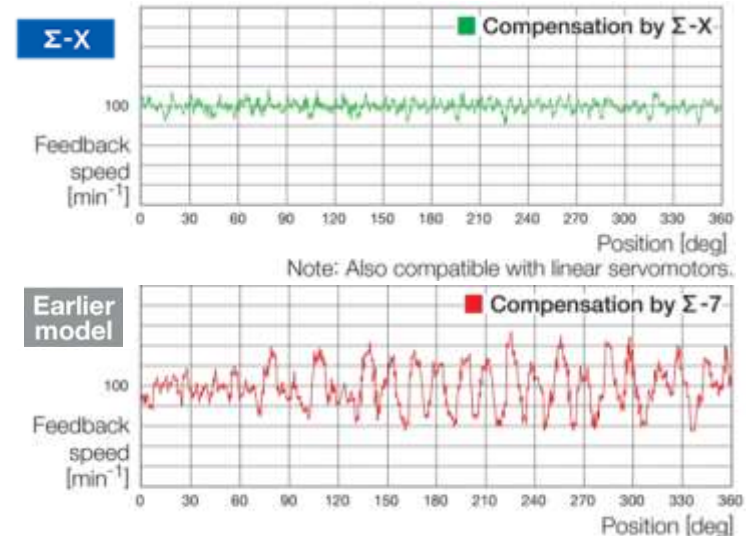

New Product Features (2/3)

Features of Σ -X Series –Sensing and use of data

**The servomotor acts as a sensor and collects various data.
It can be used for preventive maintenance of equipment.**

Σ -X uses the servomotor as a sensor to sense and monitor the parts used by the servo and the servo's installation environment. This can be useful for accurately determining maintenance periods and for preventing sudden failures.

■ Sensing Items

Encoder Power-on Time
Encoder Supply Voltage
Encoder Battery Voltage
Motor Rotation Count
Maintenance Prediction Monitor: Bearing
Maintenance Prediction Monitor: Oil Seal
Acceleration Sensor Monitor


New



Estimated External Disturbance Torque
Number of Serial Encoder Communications Errors
Settling Time
Amount of Overshoot
Residual Vibration Frequency
Estimated Vibration
Maximum Value of Accumulated Load Ratio
Number of MECHATROLINK Communications Errors
Margin until Overload
Temperature Margin until Servomotor Overheats



- Both installation environment information and the service life of parts used by the servo can be monitored.

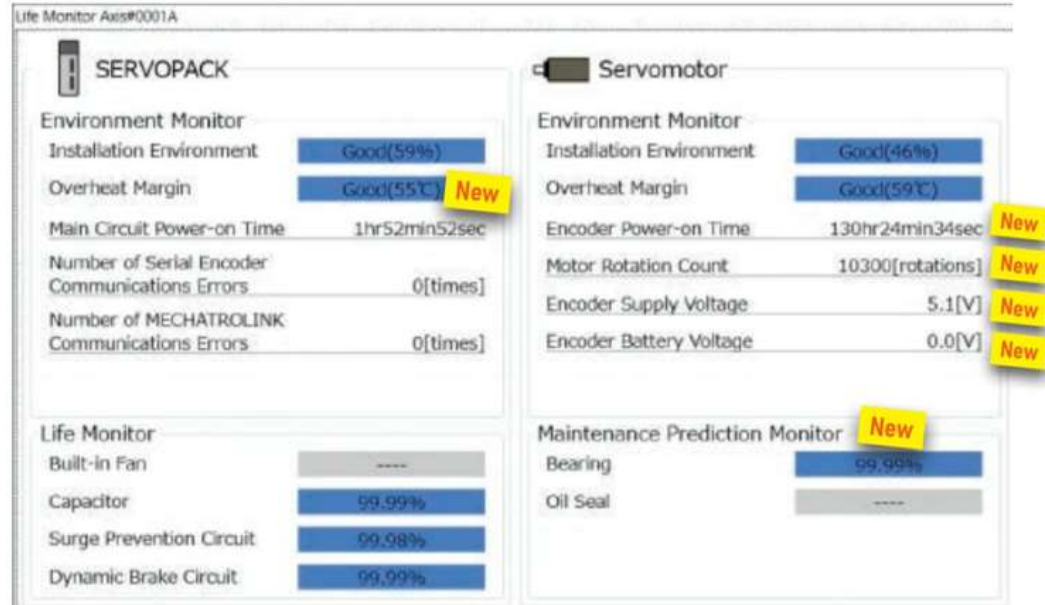

New Product Features (3/3)

YRM controller



YRM-X controller




YRM1030

① Controller for “cell control”

Cells : A connected equipment where data relatedness exists
e.g.) A cell composed of industrial robots and other
equipment performing a shared task.



Optimal for machine control



Optimal for robot control




Optimized for controlling multiple devices and robots

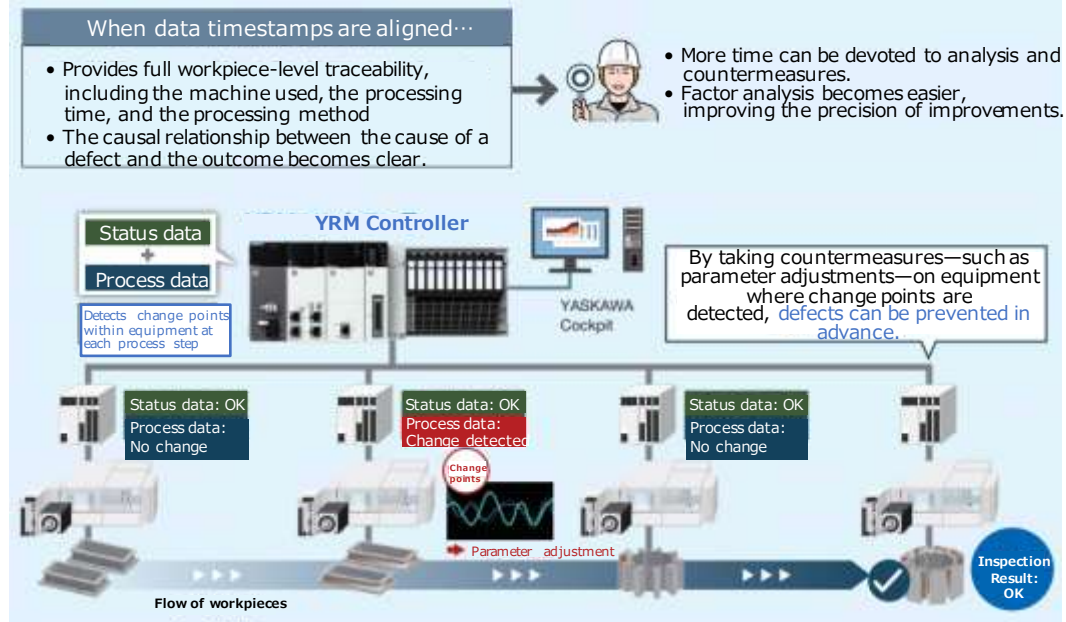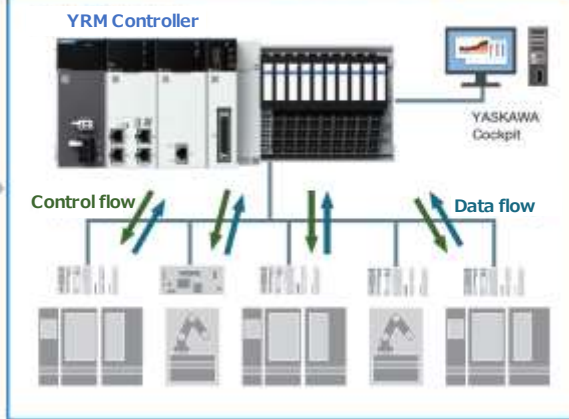

②

Clarifies the causal relationship between defect causes and inspection results using synchronized data across the entire cell


The YRM Controller collects cell data by categorizing it into status data^{*1} and process data^{*2}.
By collecting time-synchronized data for each workpiece across the entire cell, highly accurate analysis becomes possible—directly enabling the identification of abnormal or defective causes.

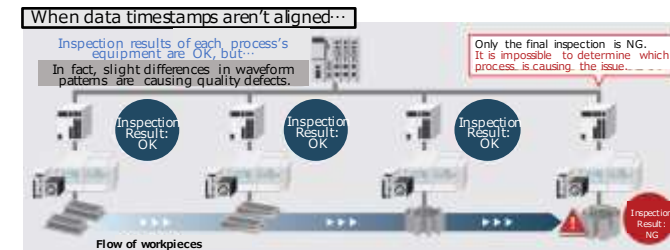


^{*1} Values or data indicating the current settings or conditions (e.g., part serial numbers, machine start/complete signals, inspection results)
^{*2} Continuous data generated during machine operation (e.g., machining speed, machining torque, press force, robot coordinates)

Products realizing i³-Mechatronics


- Products realizing i³-Mechatronics enable the collection and use of time-aligned data
- While Σ -X enables the acquisition of small amounts of data at a high frequency of μ s, YASKAWA Cockpit and YRM controller enable the collection and analysis of large amounts of data in seconds and use them for feedback.

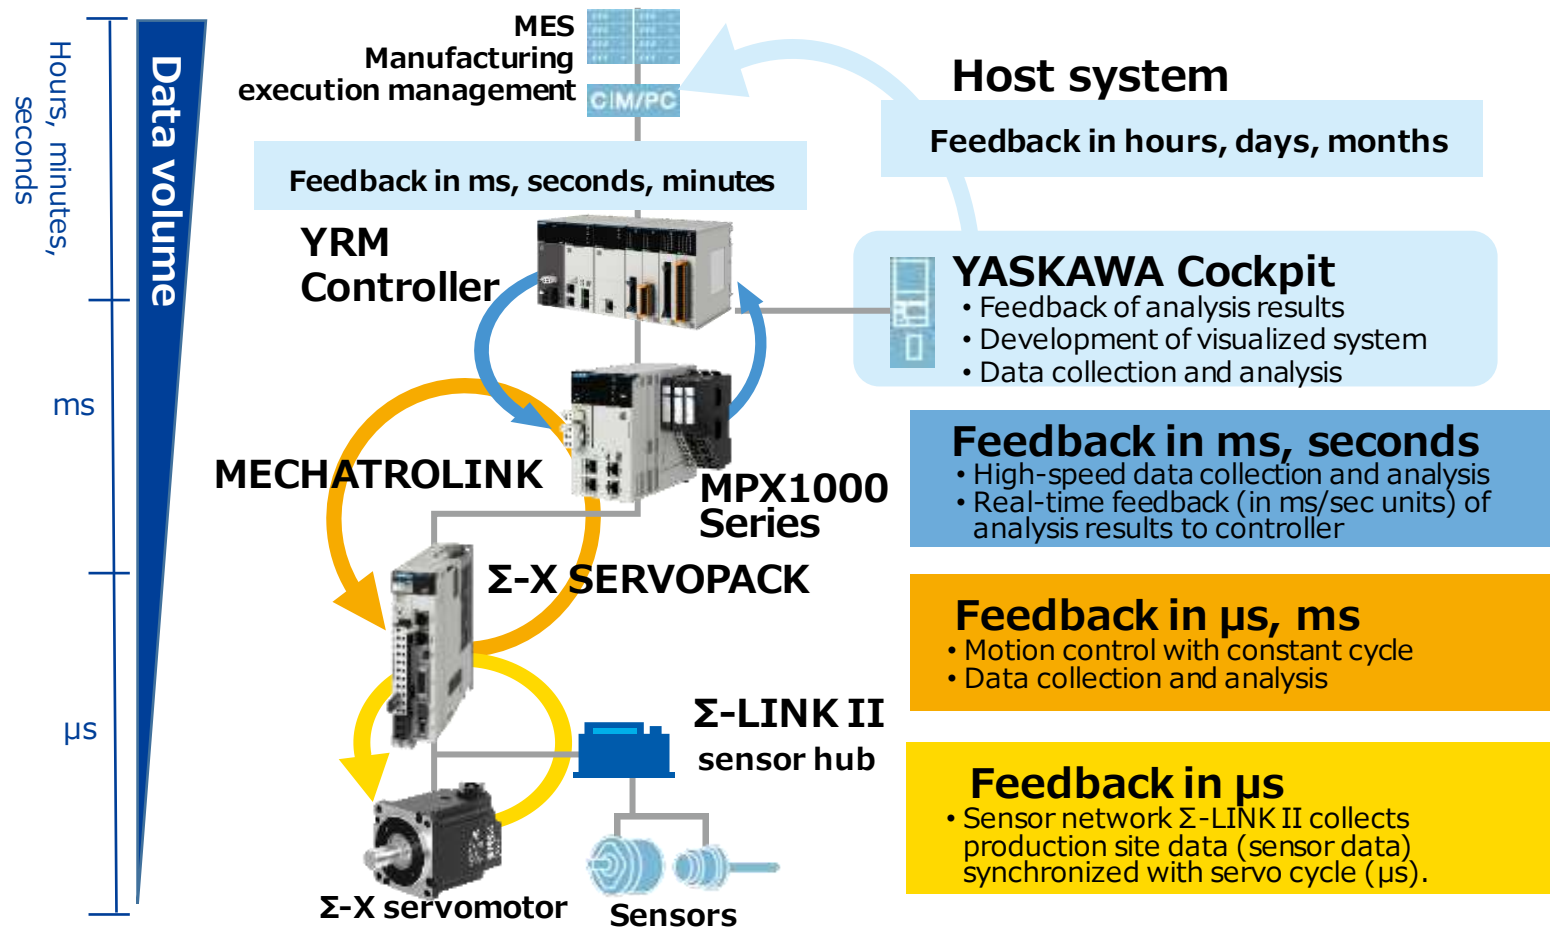

(Reference) Application of AC servo & controller

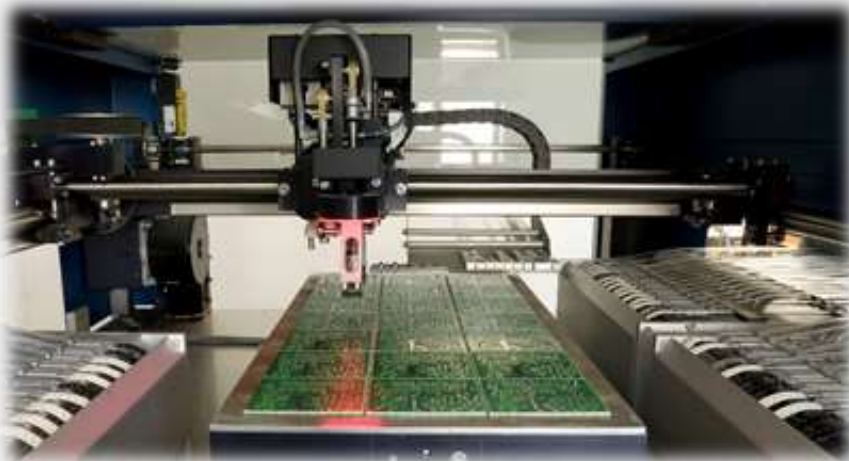


Electronic component

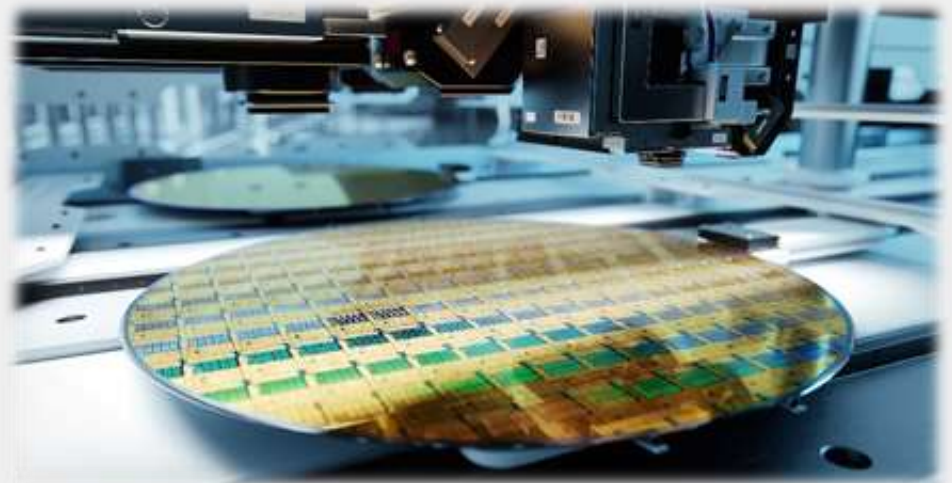

Semiconductor production equipment

Structure of die bonder

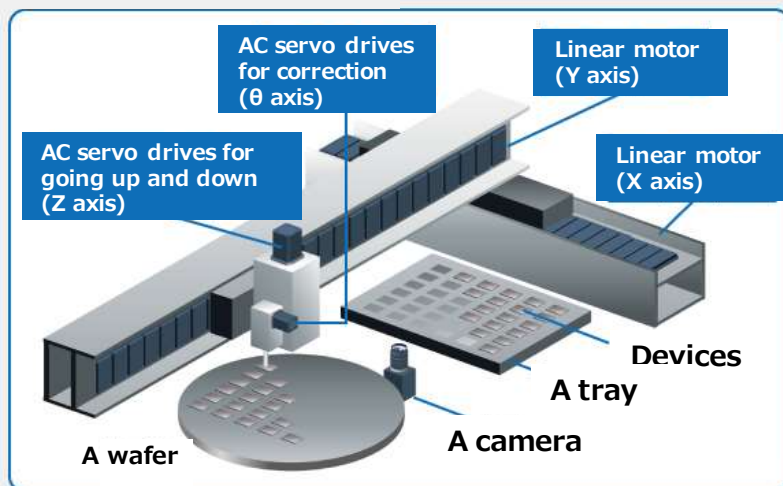

Injection molding machine



Metal processing machine


1-2. Drives



Product Basics (1/3)

What is an AC drive?



Device for controlling rotation speed by changing voltage and frequency supplied to motor

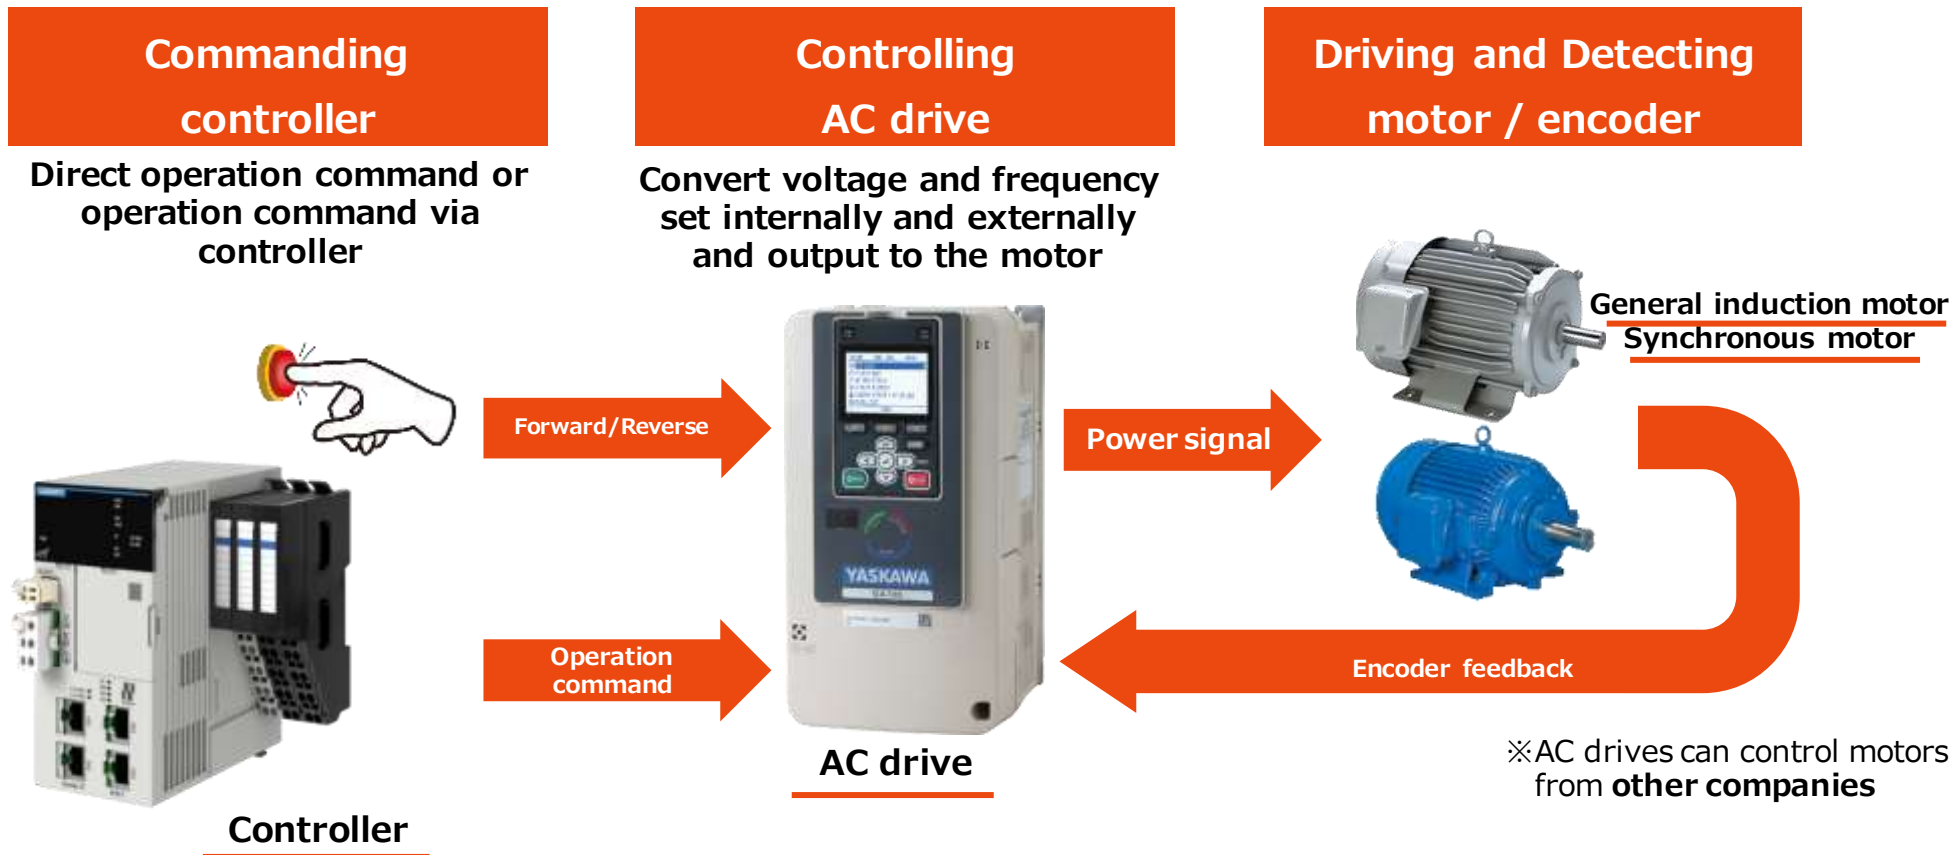

Product Basics (2/3)



What are energy conservation benefits of AC drives?

◆Conventionally, motors had constant speed + damper

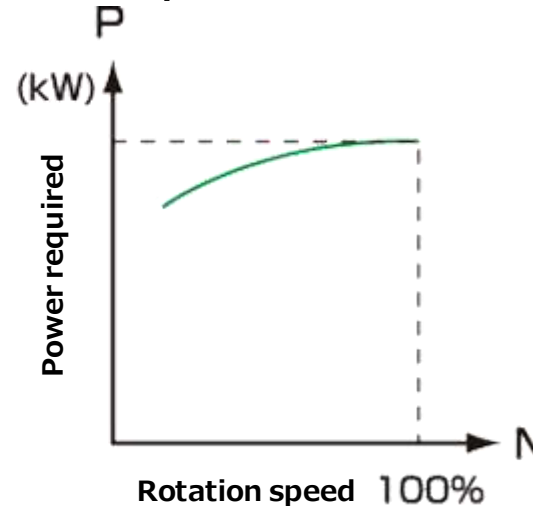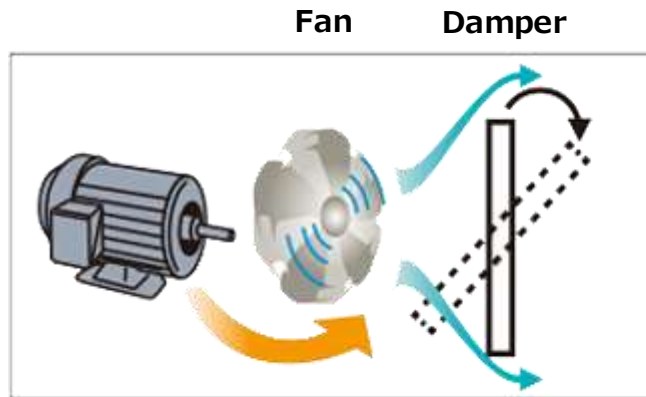

Without AC drives, the rotational speed of the motor cannot be changed, so the air volume is adjusted with a damper (on-off valve).

◆Variable speed motor control by AC drives

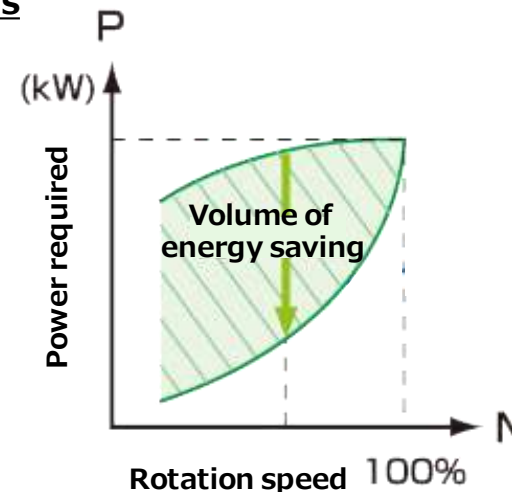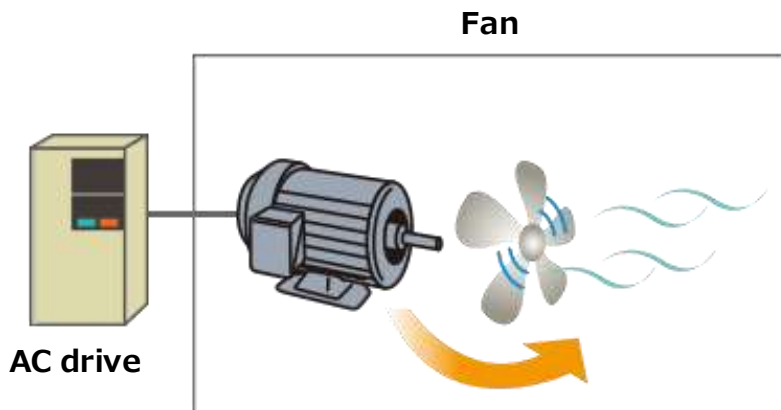


AC drives can adjust the motor speed according to the required air quantity, resulting in saving a lot of energy.

Product Basics (3/3)

The reason AC drives are needed

- ◆ Motor takes about half of the world's electric power consumption

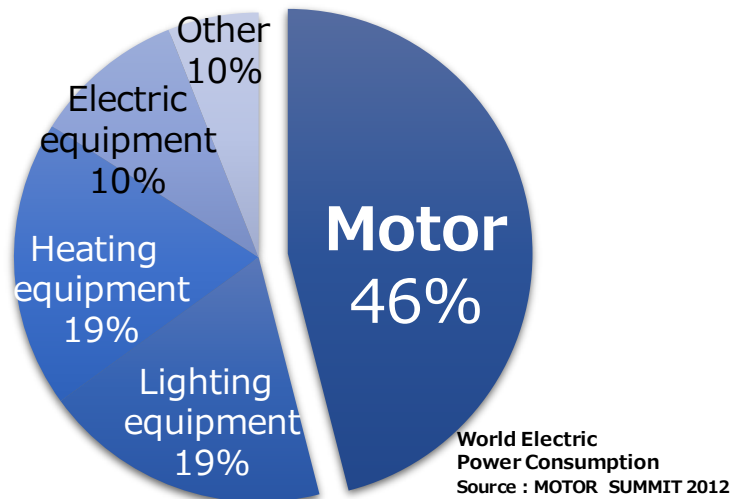

- ◆ High efficiency motors require AC drives

Efficiency Classified

High
↑
Efficiency
↓
Low

IE5 Ultra Premium High Efficiency Motor

IE4 Super Premium High Efficiency Motor

IE3 Premium High Efficiency Motor

IE2 High Efficiency Motor

IE1 Standard Motor

Motor Type

Permanent magnet motors,
Magnet-assisted Synchronous reluctance motors

Permanent magnet motors,
Magnet-assisted Synchronous reluctance motors

Permanent magnet motors,
Synchronous reluctance motors

Induction motors

Induction motors

AC drives
required

AC drives
required
in EU

- ◆ Global regulations have accelerated the high efficiency-oriented needs towards motors

Country Name (Region)	Schedule for introducing high efficiency regulations											
	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	
Japan 	IE1	Top Runner standards IE3										
U.S. 	IE3	(Foot mount type, etc.)	IE3									
	IE2	(Flange type, etc.)	IE3									
China 	IE2					IE3 or IE2 IE3(PM motor added)				IE3		
Europe 	IE2	IE3 or IE2+drive					IE3			IE4		
												IE3
Korea 	IE2	IE3										

Refer to "Trends in Overseas Efficiency" published by JEMA (The Japan Electrical Manufacturers' Association) (Oct, 2020)

Applications and Market

Fluid machinery

- Air conditioning system
- Fan pump
- Compressor
- Vacuum pump
- Chiller



AC Drive/PM motor



**Supports motion control
for broad applications**

General industrial machine

- Metal processing machine
- Food machine
- Wood processing machine
- Textile machine
- Resin molding machine
- Chemical machine
- Papermaking and printing machines
- Packaging and filling machines




Conveyance machine

- Conveyor
- Crane
- Hoisting machine
- Multistory parking garage




Lift

- Elevator
- Escalator
- Light Lift
- Automated warehouse



Product Lineup

Develop lineup for application-specific products, including power supply regeneration and vibration suppression functions

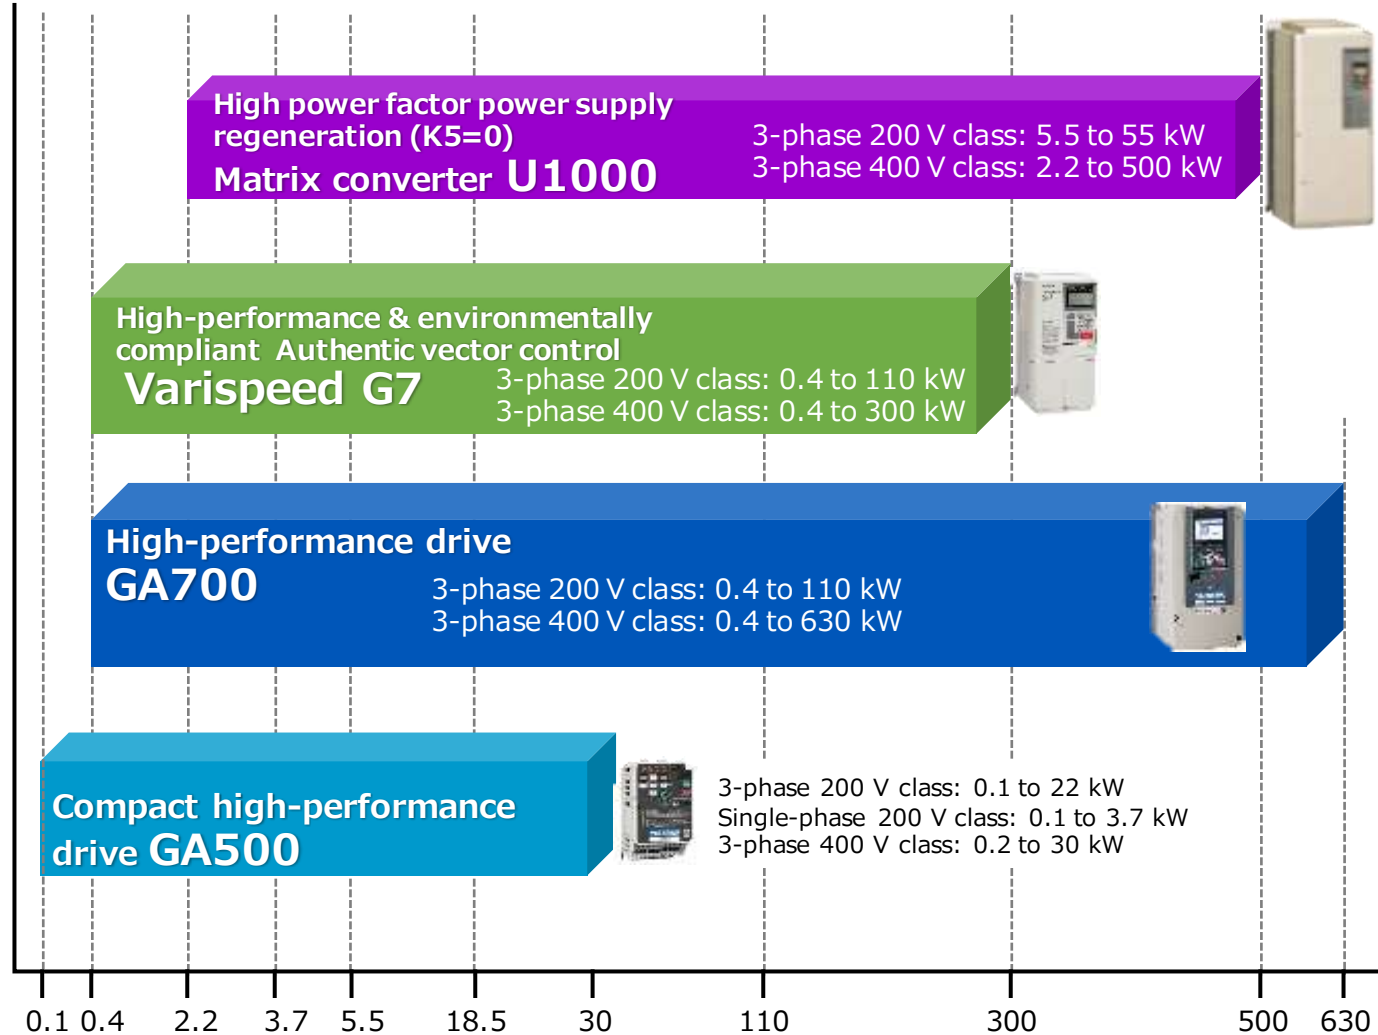

For Lifts
LA700/ES700*1



For HVAC
HV600*1



for pumps
FP605*1




For cranes
CR700/CH700*1


*1: Sold overseas only

Revenue Breakdown by Region and Application, Market Share


Breakdown of revenue by region

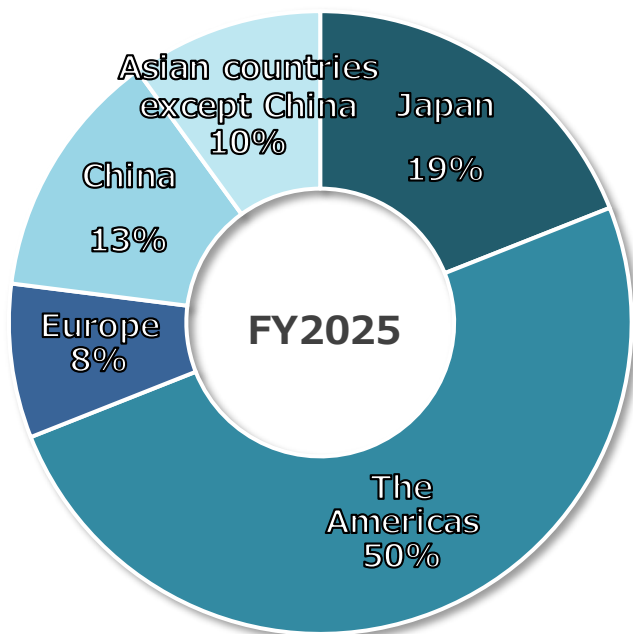

Revenue breakdown by application

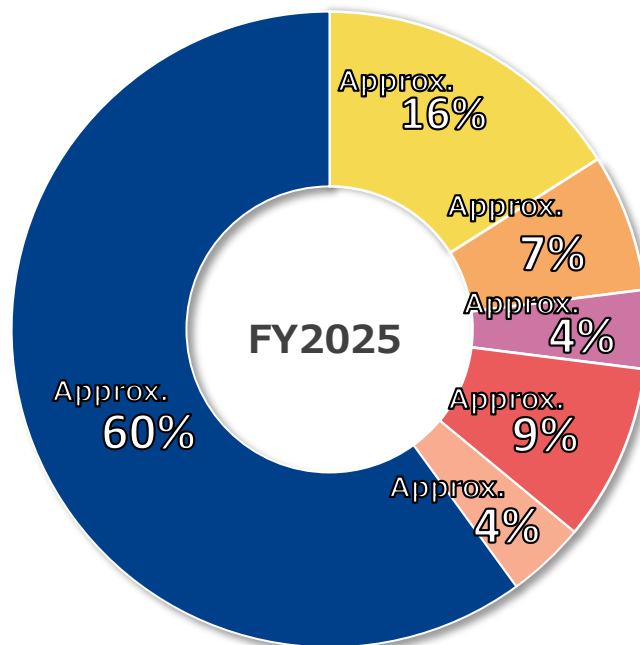


Market share

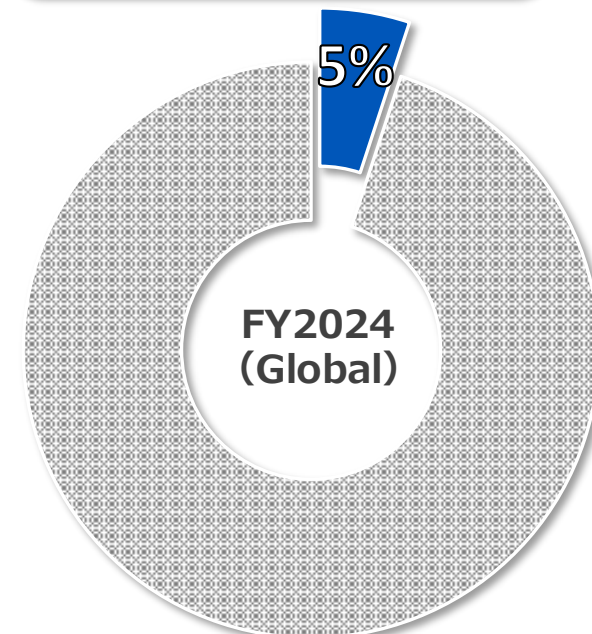

[Note] Company estimate

- Air-conditioning systems for buildings (HVAC) and compressors
- Cranes and hoists
- Oil & gas
- General-purpose machinery / Other (Textile machinery, metal processing machinery, packaging machinery, conveyors, etc.)
- Pumps and fans
- Elevators


Total Shipment

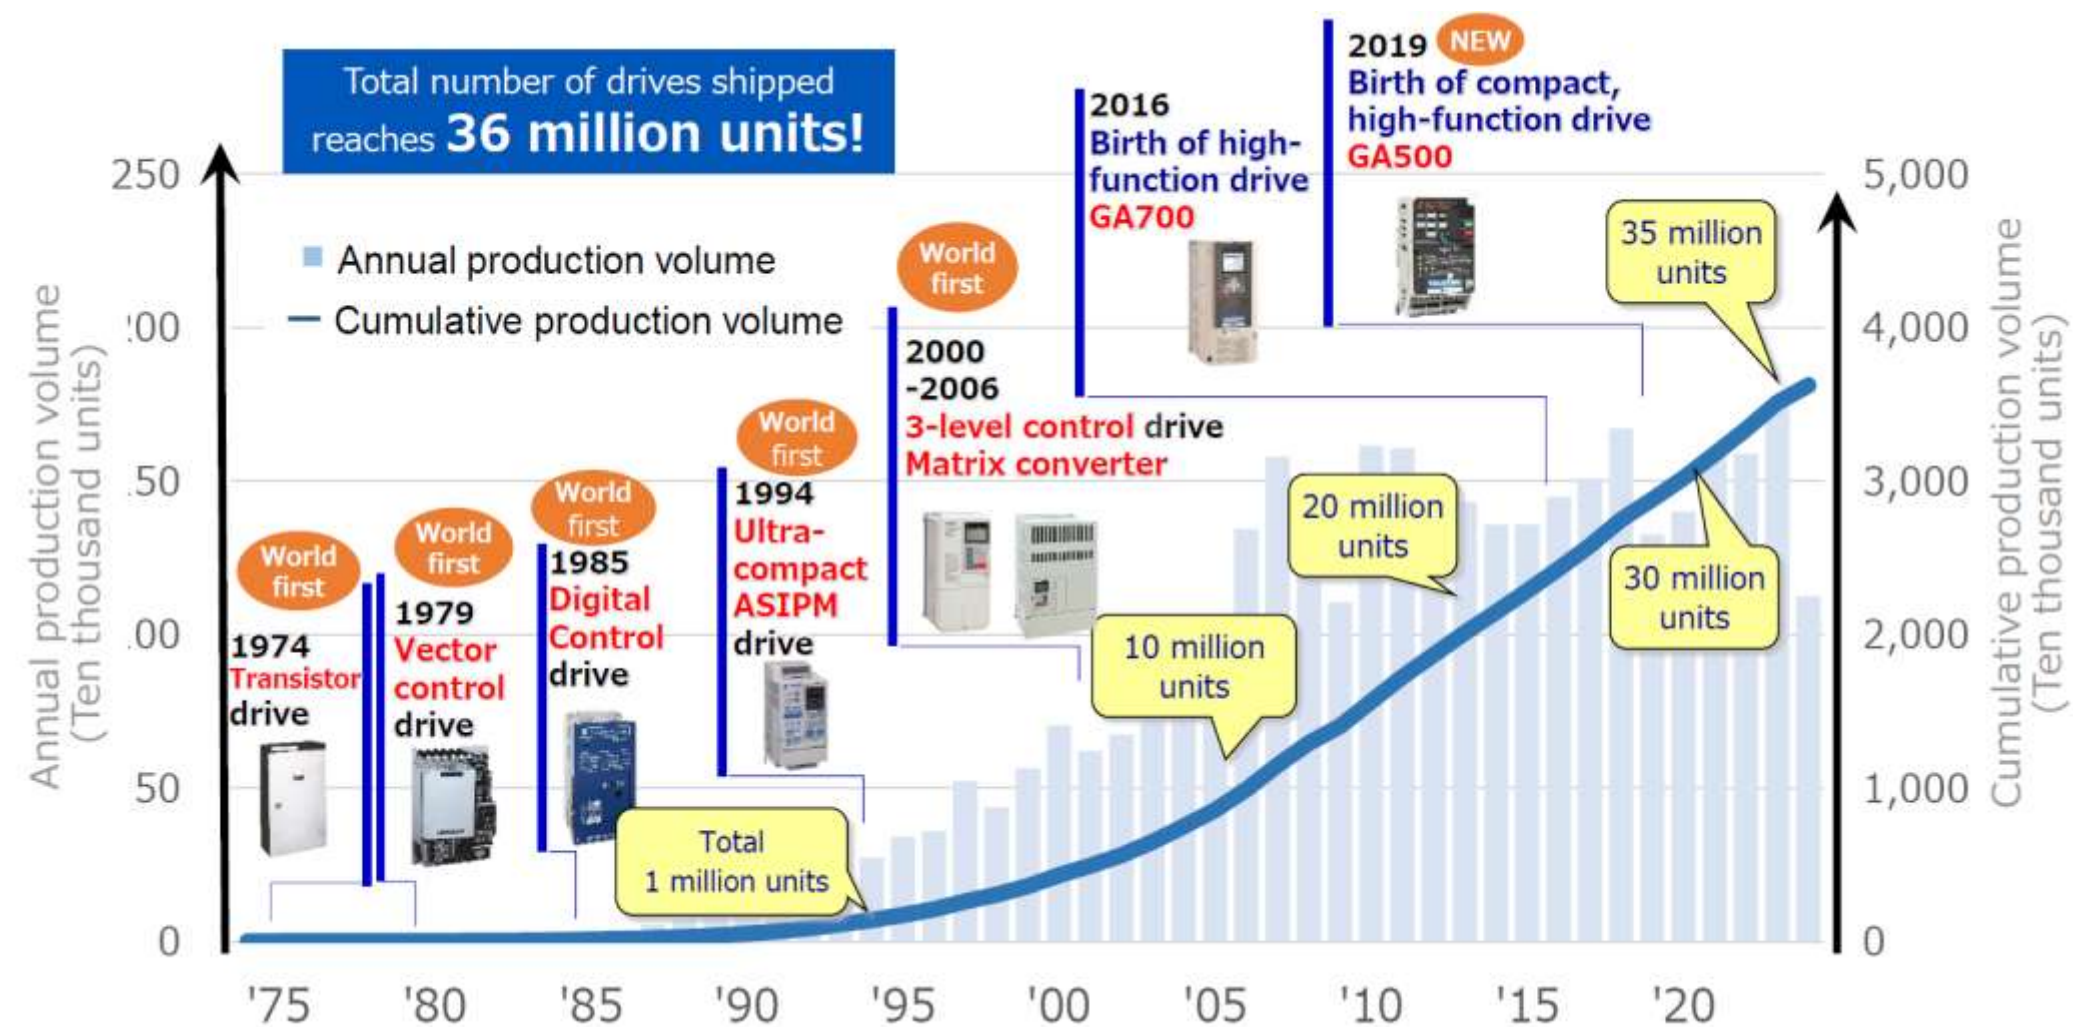

Features of Yaskawa's products (1/4)

Unique detecting function

Monitoring machine behavior data through AC drives and preventing serious troubles by detecting machine changes in detail

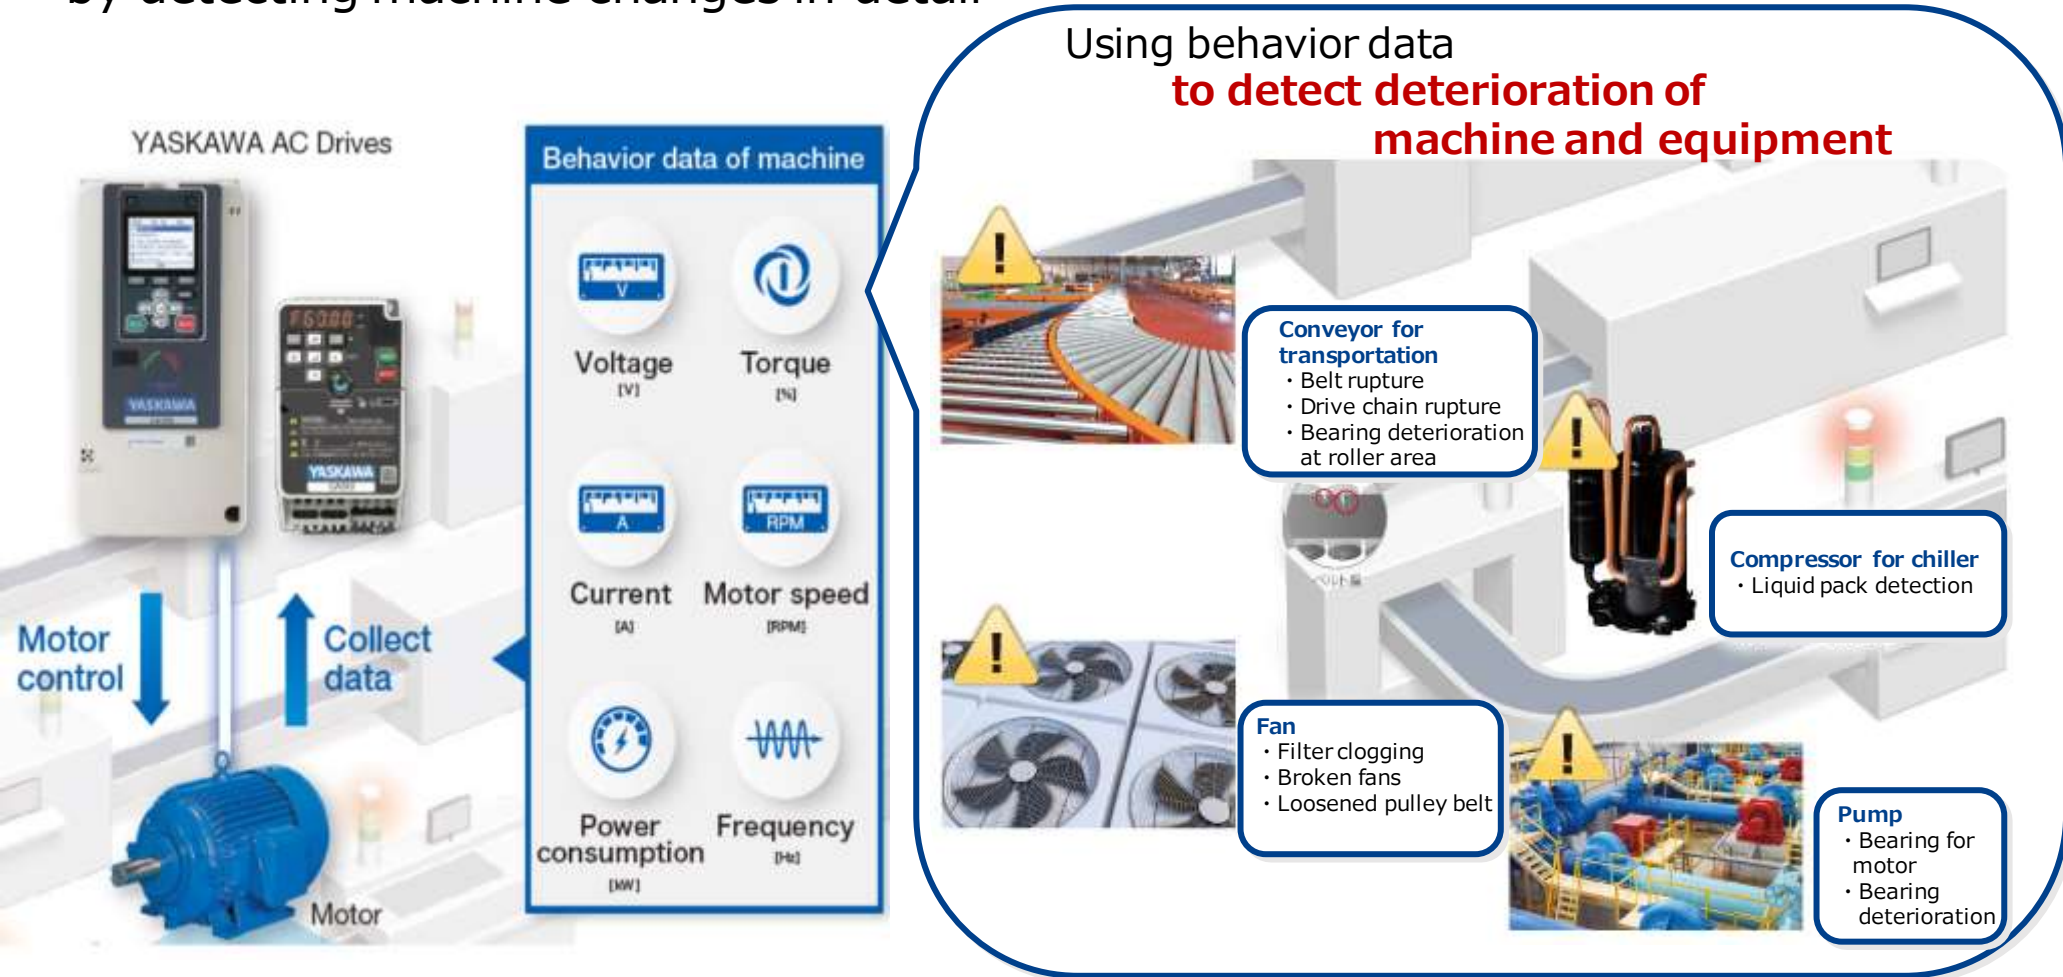

Features of Yaskawa's products (2/4)

Energy-saving initiatives 1

Selling **PM motor** achieving high-efficiency, energy-saving operation when used in combination with AC drives

Lineup



Eco PM motor flat type


- Achieving the highest (IE5) efficiency of the five efficiency classes
- Contributing to space-saving, resource-saving, and energy-saving by significant reduction of motor length
- Decreasing noise level by reduction of fans



IPM motor SS7


- Realizing the high efficiency which is nearly the second highest (IE4) of the five efficiency classes
- Compact and lightweight, contributing to resource conservation

Installation area
25%* reduction

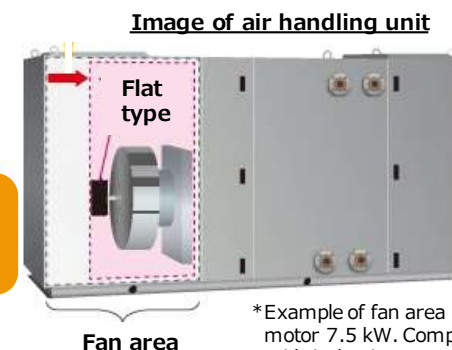

*Example of fan area of motor 7.5 kW. Comparison with induction motor.

Comparison of efficiency between IPM motor SS7 and general induction motor

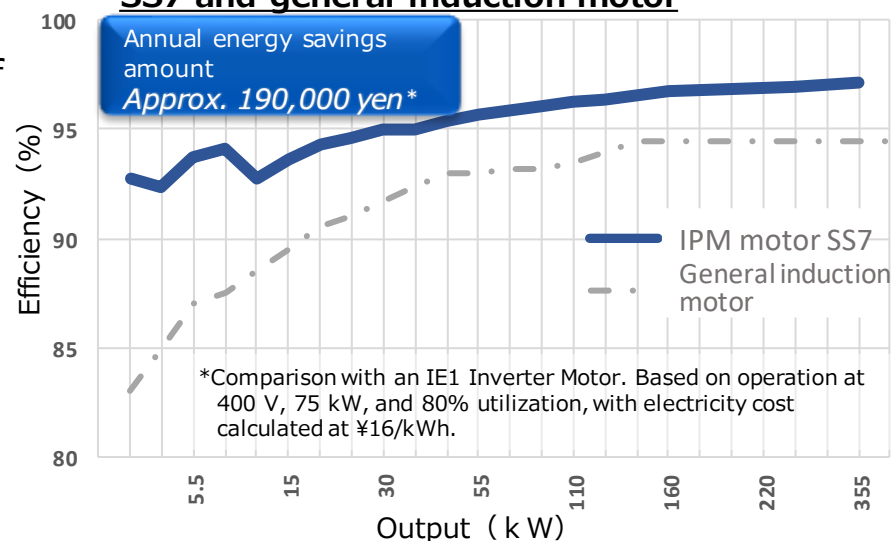

Features of Yaskawa's products (3/4)


Energy-saving initiatives 2

Save energy by reusing the regenerative energy

Regenerative energy

- Energy generated by the motor
- When the crane lowers the load, the weight of the load rotates the motor and generates energy.

■ Lifts, such as cranes

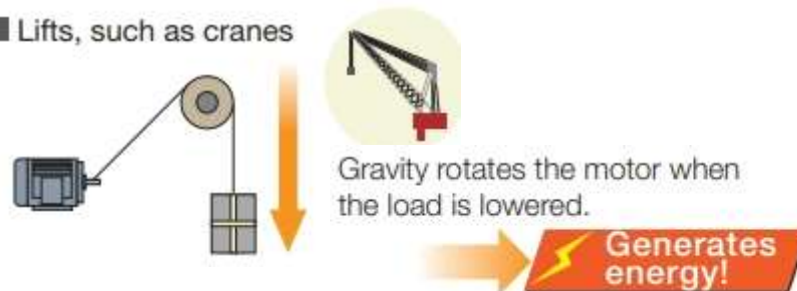


Low Harmonics Regenerative Matrix Converter U1000


- Return the regenerative energy which was conventionally discarded as heat to the power supply and reuse



Conventionally

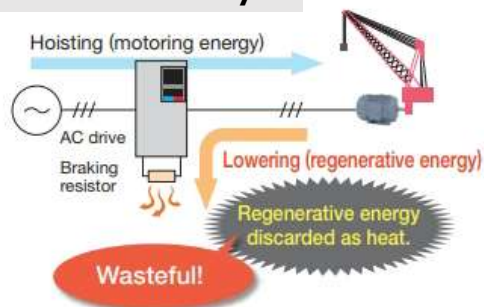

U1000

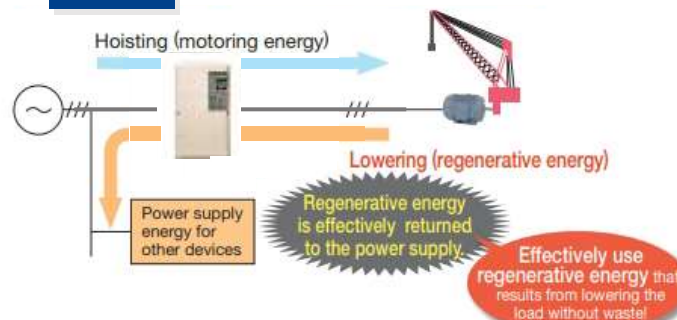

Features of Yaskawa's products (4/4)

PV inverter for solar power generation*

Supporting a wide range systems, from self-use and low-voltage grid connection less than 50kW to mega solar.


For low voltage commercial systems (10~50kW)



Public Facilities
Self-Consumption
PPA

Newly installed
self-consumption

Factories
Self-Consumption
PPA



Ground mounted small scale Solar

Replace and
Repowering

Utility scale Solar



Good for self-
consumption

9.9kW 200V class 3-phase transformer-based
Enewell-SOL P2H
HF transformer integrated.


25kW 200V class 3-phase
Enewell-SOL P3A

Helps slim down PV system with integrated
self-consumption features.

Optimized for
self-consumption



System configuration

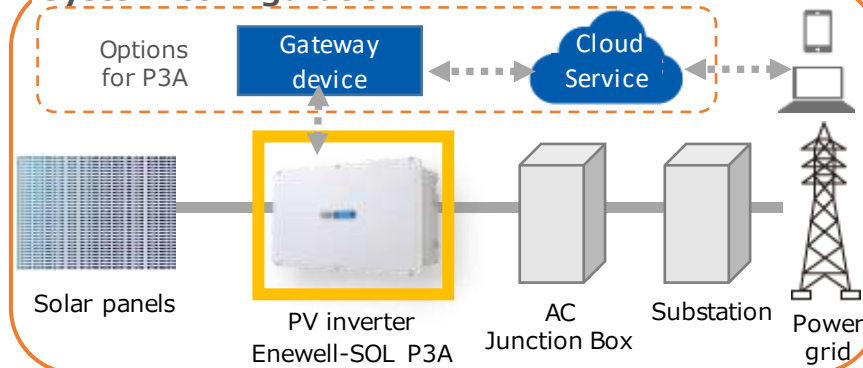

*Device for converting DC power generated by solar panel into AC power

(Reference) Application of AC drives



Cranes



Fans



Pumps



Conveyors



Automated
warehouse


YASKAWA

2. Robotics



Product Basics (1/2)


Basic configuration of industrial robots

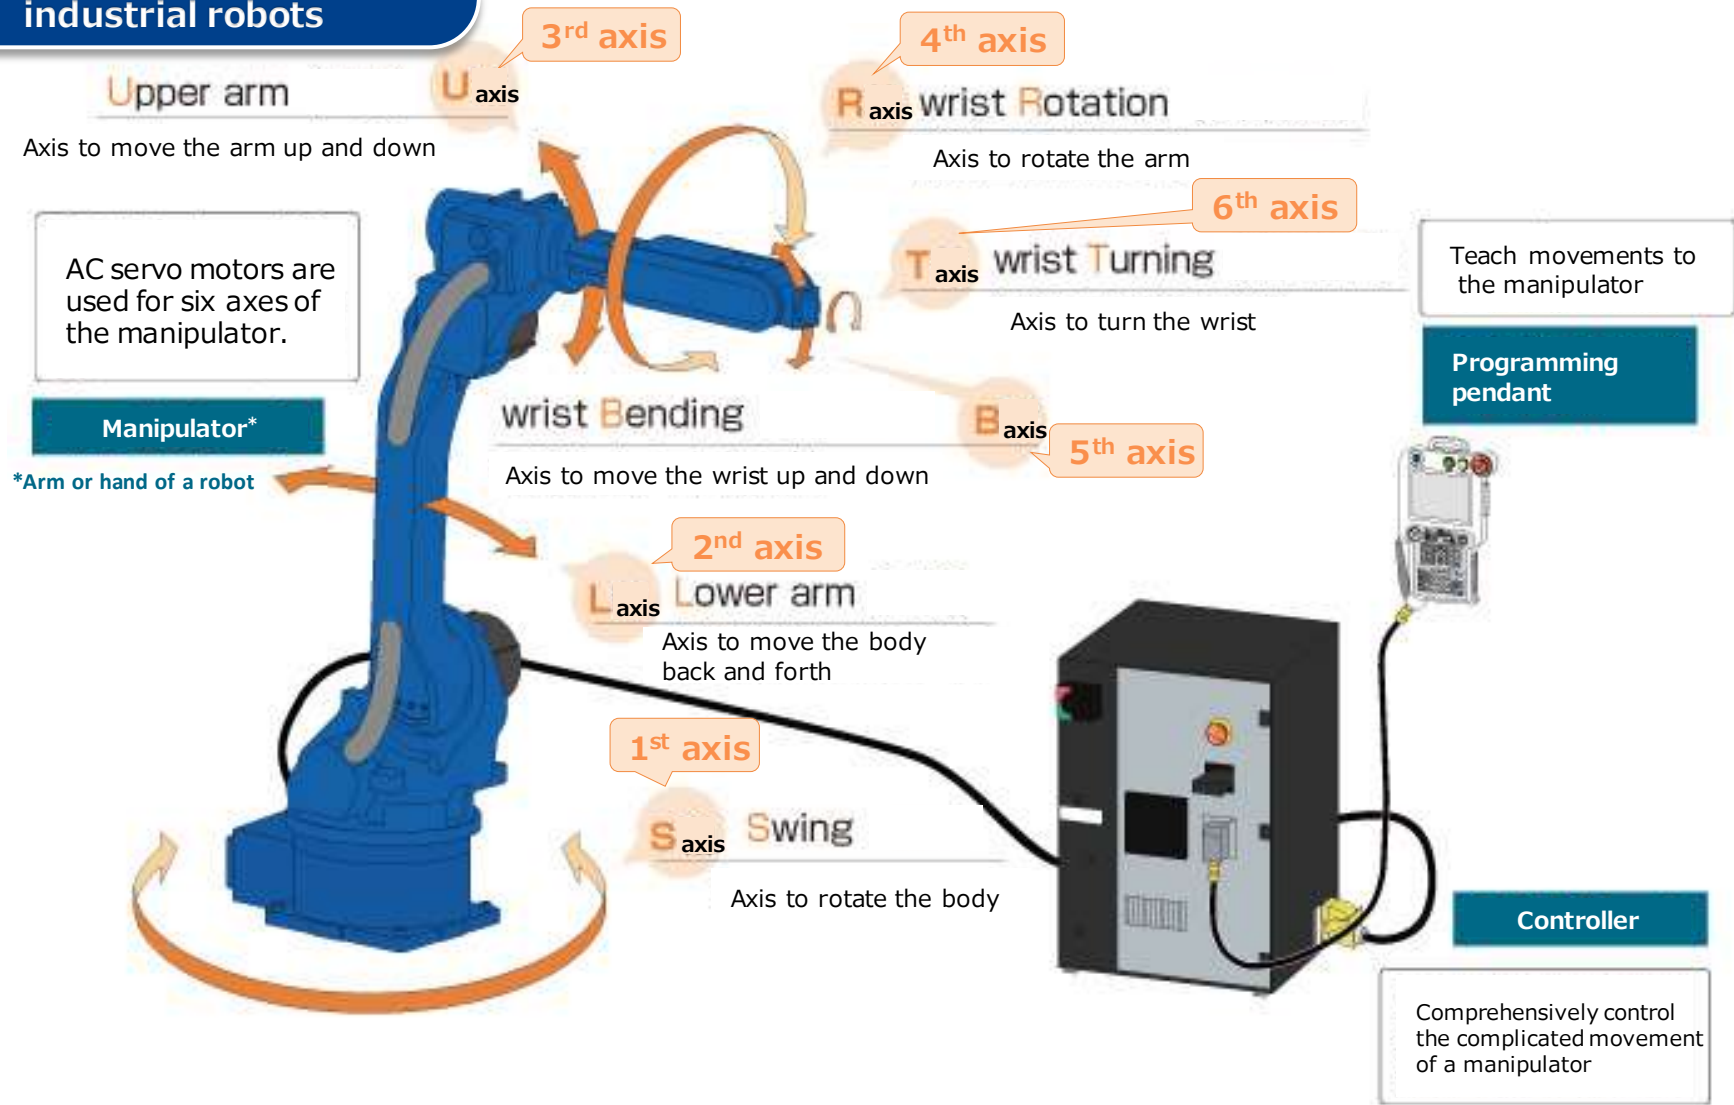


Product Basics (2/2)

Image of robot control

- A robot motion program is created in the dedicated robot controller (e.g.: YRC 1000 micro) with a teach pendant.
- The upper controller such as MP controller controls the entire facility including starting the operation program and collecting operation status data.

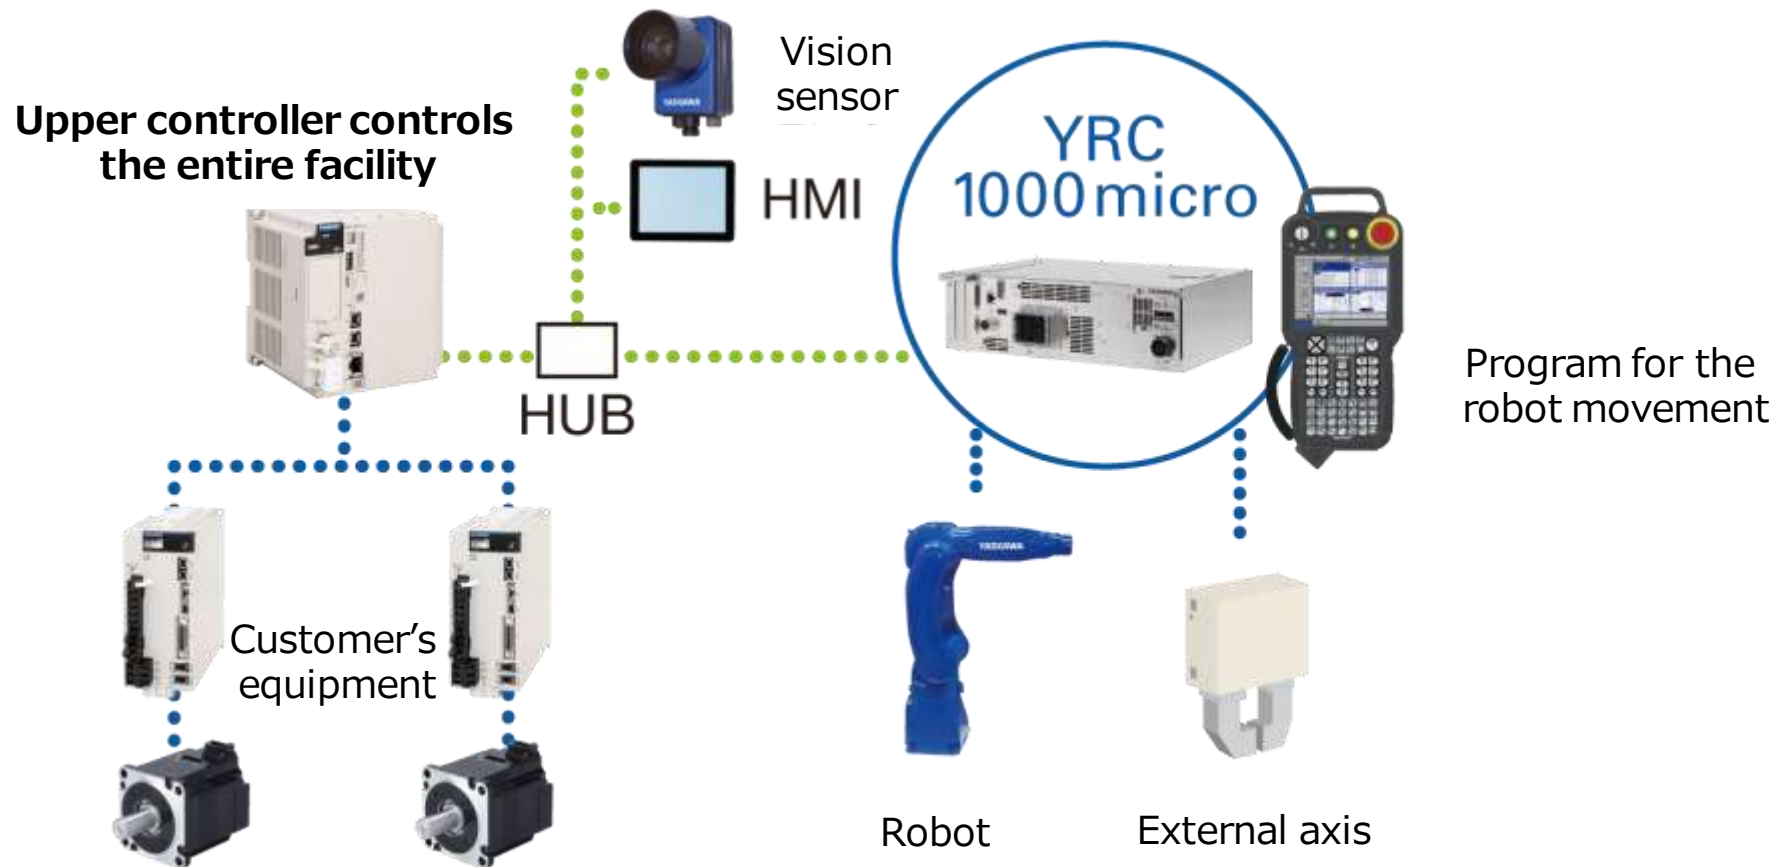

Applications

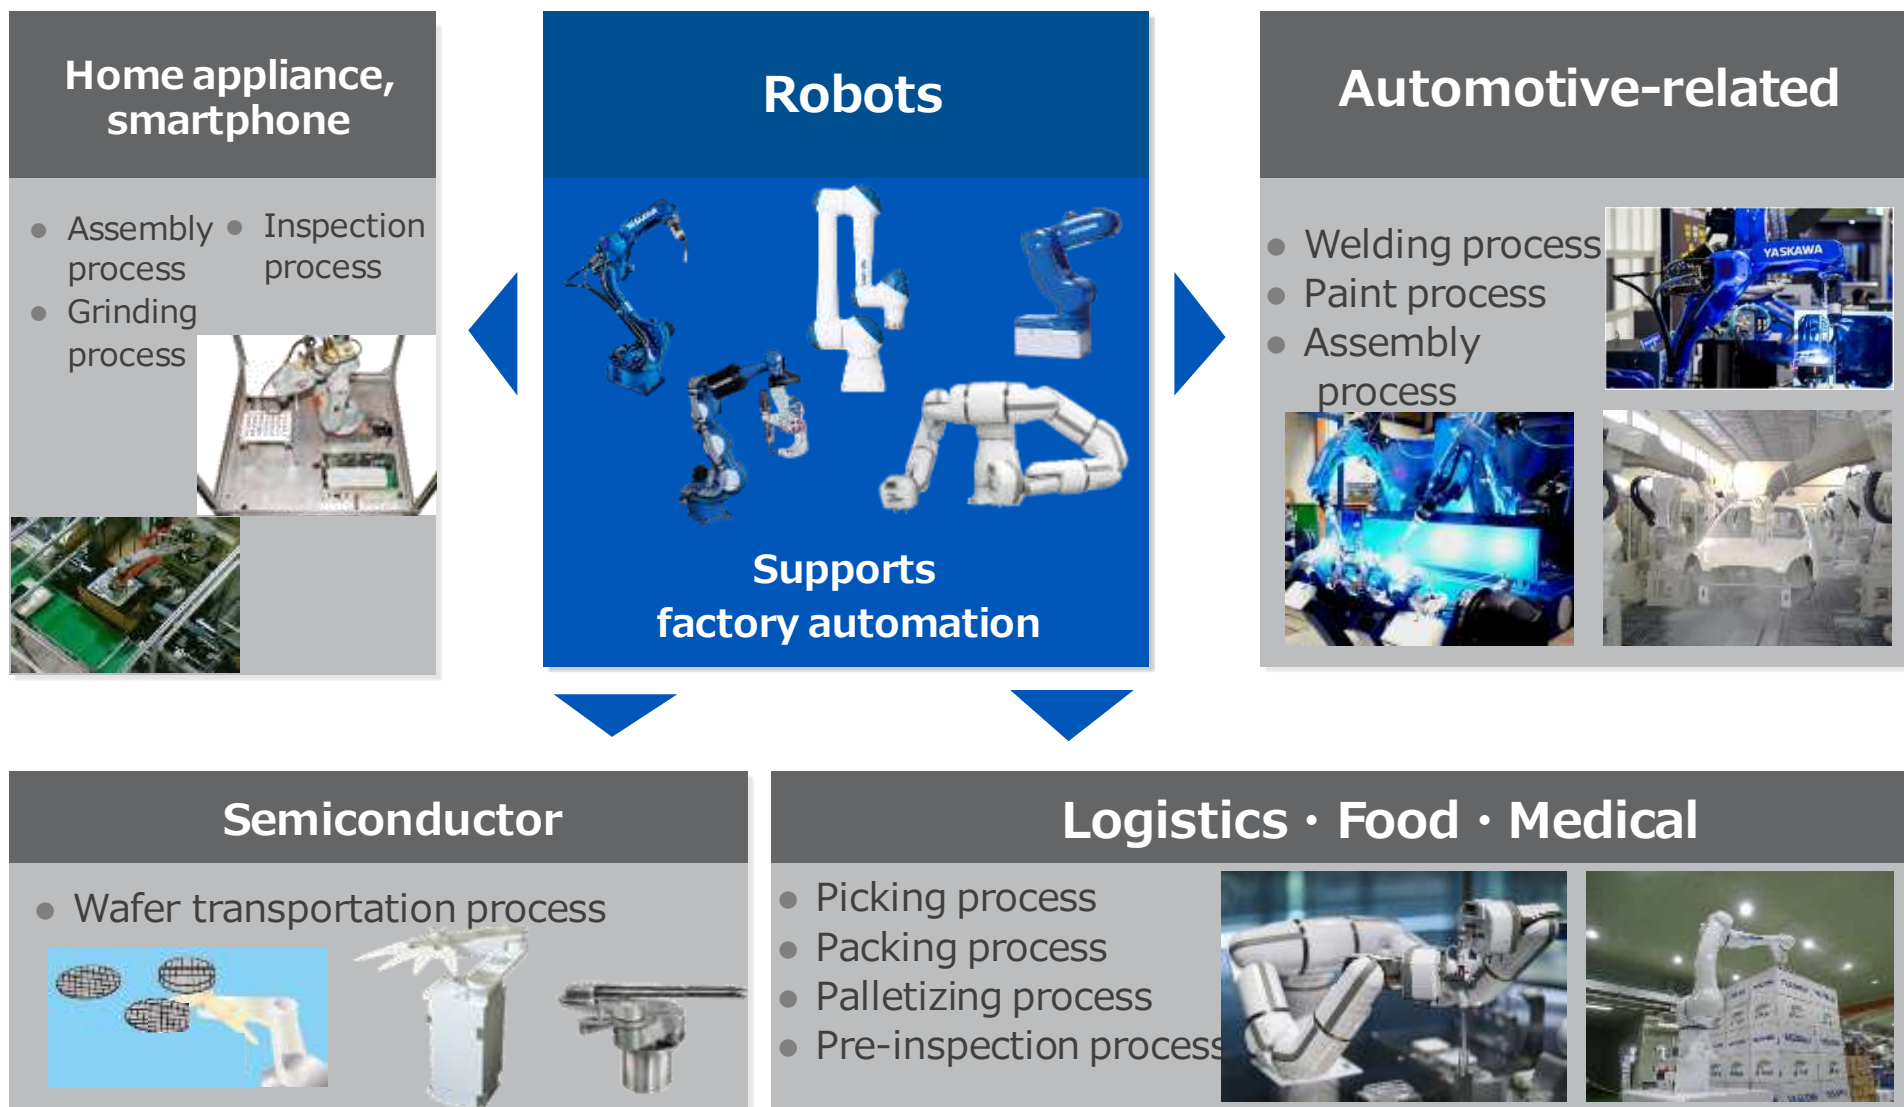

Product Lineup

Industrial robots (automotive and general industry)


Arc welding



Spot welding



Painting

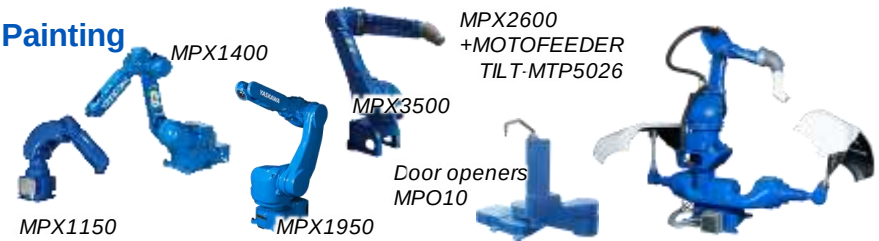

Part handling



Picking, Packing, Palletizing



Mechanical forming



Robots for Clean Room

Semiconductor wafer transfer




Collaborative robots



7-axis robots Dual-arm robots


Transfer and assembly



Biomedical robots



Revenue / Operating Profit (Robotics)

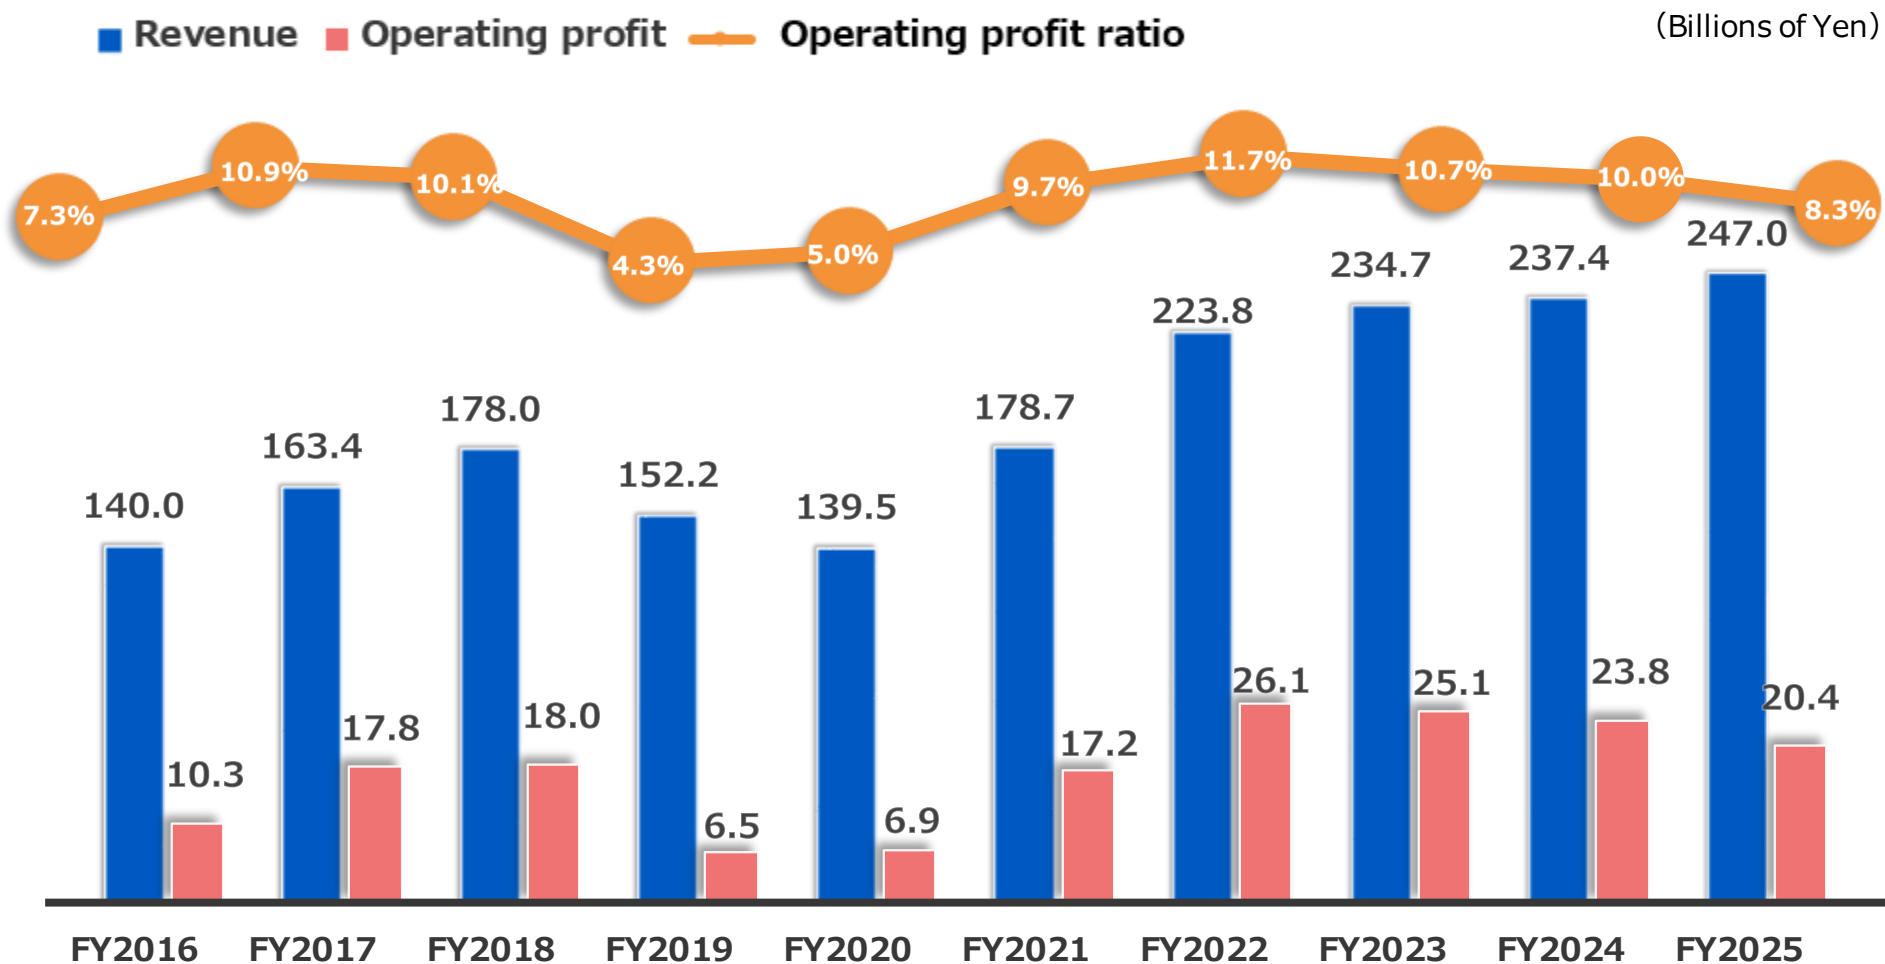


Note1: Data up to FY2017 are based on Japanese GAAP.


Note2: The Company changed its accounting period starting FY2017 from March 20 to the last day of February. As a transitional year for this change, FY2017 was from March 21, 2017 to February 28, 2018.

Revenue Breakdown by Region and Application, Market Share

Breakdown of revenue by region

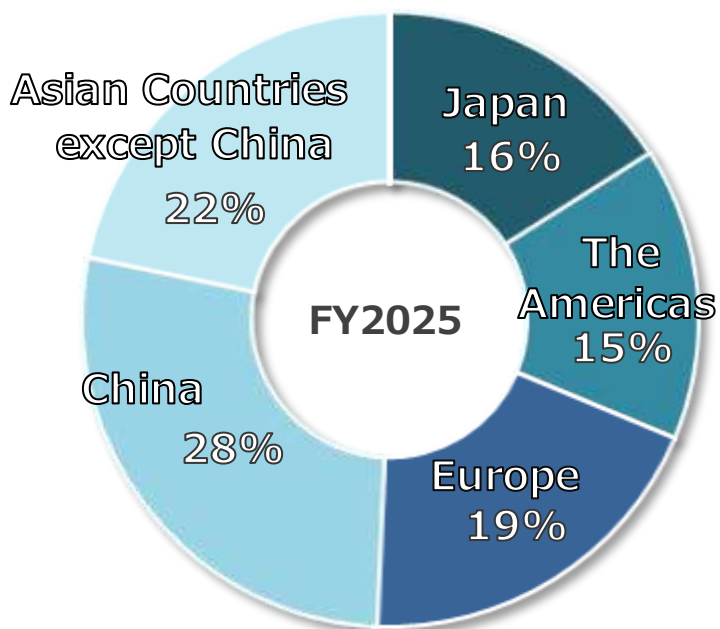


Revenue breakdown by application

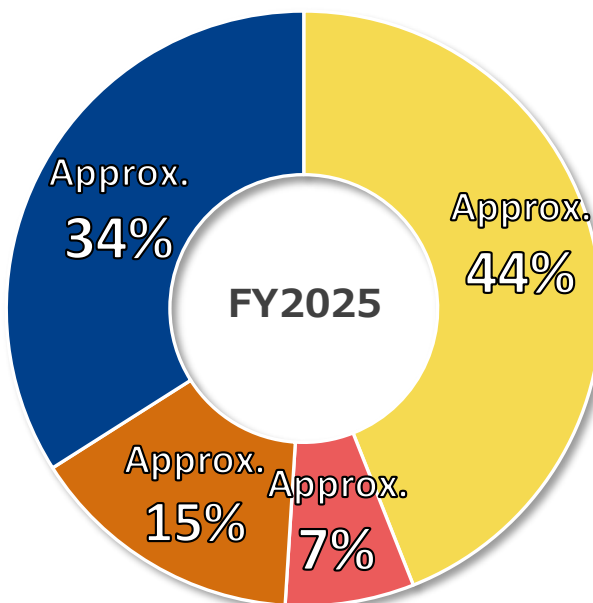


- Automotive-related applications (Arc welding, spot welding, painting, etc.)
- Semiconductor and LCD related applications
- Customer service
- General / Other (3C, Handling, etc.)

Market share

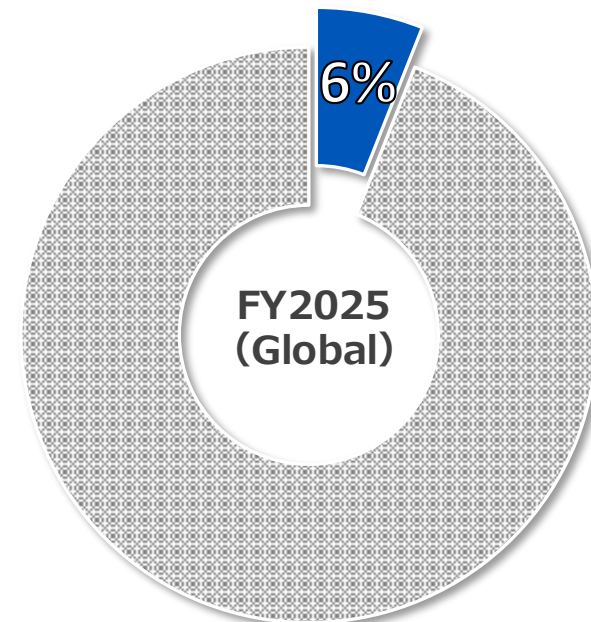

[Note] Company estimate

Total Shipment

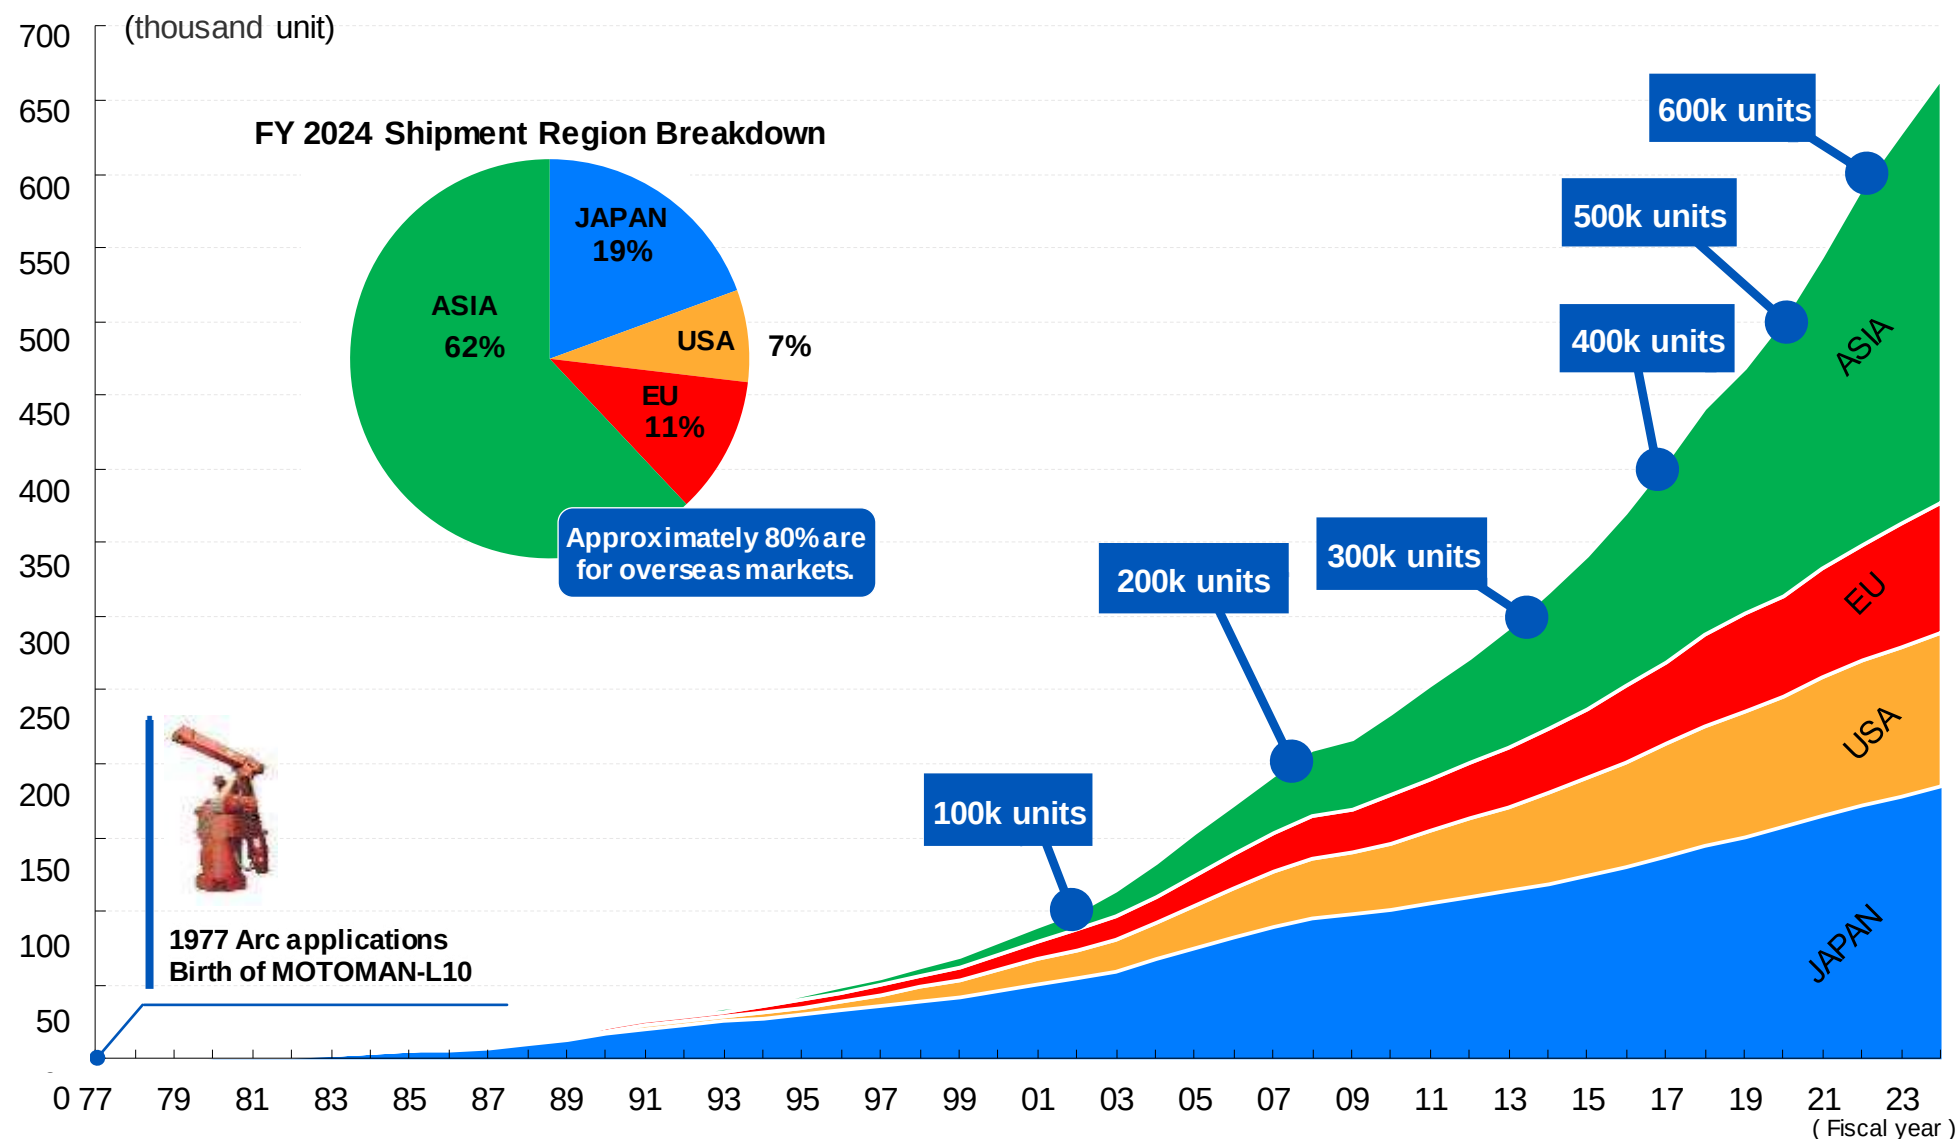

Yaskawa's Robots (1/4)

Arc welding


An adhesion method by melting base material. It contributes to the automation of parts processing in various industries, including the automotive industry. It increases productivity by expanding flexibility of robot posture and speeding up operation.



AR1440



The work point of arc welding

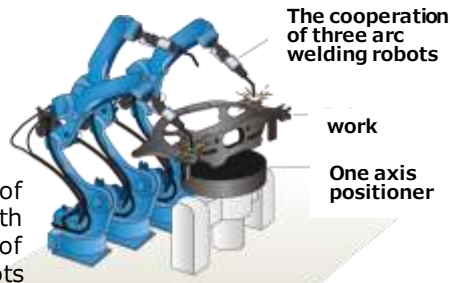

Arc welding of auto parts with the cooperation of three robots

Spot welding

A joining method that applies pressure to two steel sheets to bond them together. Widely used for automotive body assembly.



SP100B

7-axis structure enables to install in high density

SP225H

Hollow arm is designed for spot rigging.



Car production line spot welding system

Laser welding

A welding method in which metal is melted and joined by a laser beam.



MOTOPAC-RL2D

Laser welding package

- Robot controller and laser scanner are fully synchronized.

Handling

Provide wide variation of robots (payload: 0.5 - 600kg) to contribute automation of customers' production line



MotoMINI
(Payload 0.5kg)



GP4
(Payload 4kg)



GP8
(Food specification)



GP225
(Payload 225kg)



Handling of tomatoes with small robots MotoMINI

Collaborative

MOTOMAN-HC series is designed to collaborate with human

Realize the cost reduction

- 1) Elimination of the safety fences by the safe structure and function.
- 2) Saving spaces

Smart functionality

- 1) Robot teaching can be simplified by the direct teaching function and Smart Pendant.

Expansion of the applicable area by extensive product lineup

- 1) Dust & drip-proof specifications
- 2) Food specifications
- 3) High payload type
- 4) Hand-carry type



HC10SDTP
(Dust & drip-proof specifications)



HC20DTP
(Dust & drip-proof specifications)




HC10DTFP
(Food specifications)



HC10DTP
(Hand-carry type)


Picking • Packing • Palletizing

Contributing to automated conveyor system for food, cosmetics and pharmaceuticals

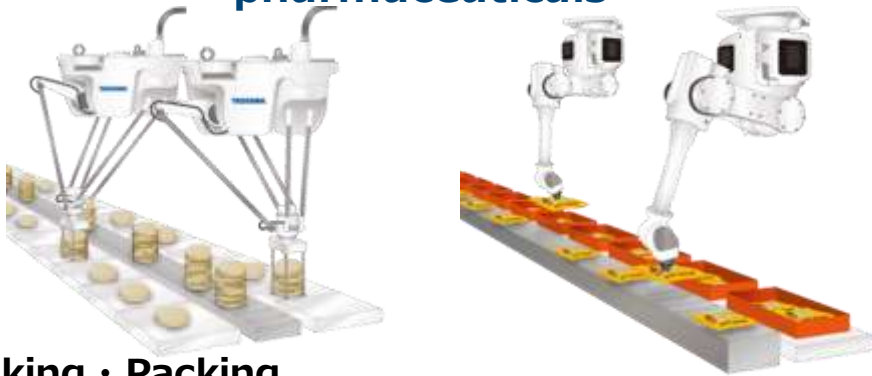

Picking • Packing

Grabbing and lining up items on a conveyor belt and packing them in boxes

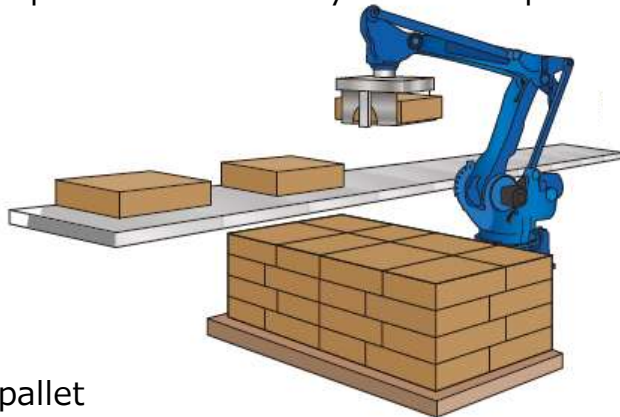

Palletizing

Placing boxes on a pallet

Painting

- Installing a paint gun and painting cars and small parts
- Explosion-proof for work in an environment with flammable gases

Automobile industry
(Painting car body)
MPX2600

General Industry
(For medium-size
work piece)
MPX1950




Car painting by
painting robot and
door opener robot



Biomedical

Best for automation in biomedical field which requires hygiene control

- Resolve challenges such as manual variations and errors, risk of exposure to hazardous chemicals, and long routine work
- Use of analytical equipment and containers used by humans

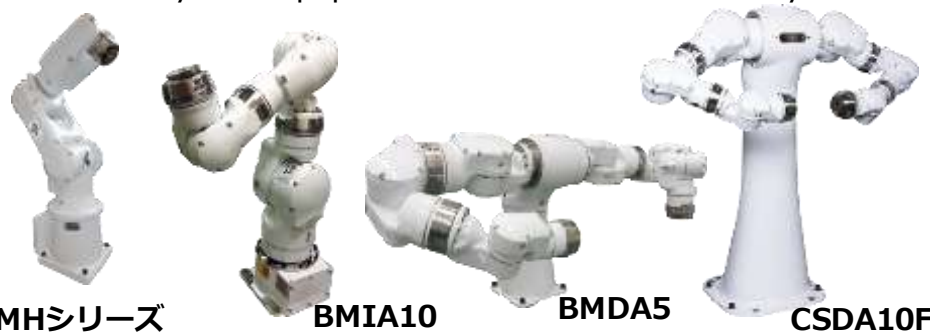

Application examples


- Bio analysis
- Drug development
- Preparation of anticancer

Clean robot

A wide range of products to meet diverse needs

[Clean robot]

High speed and reliable clean robot for wafer transfer

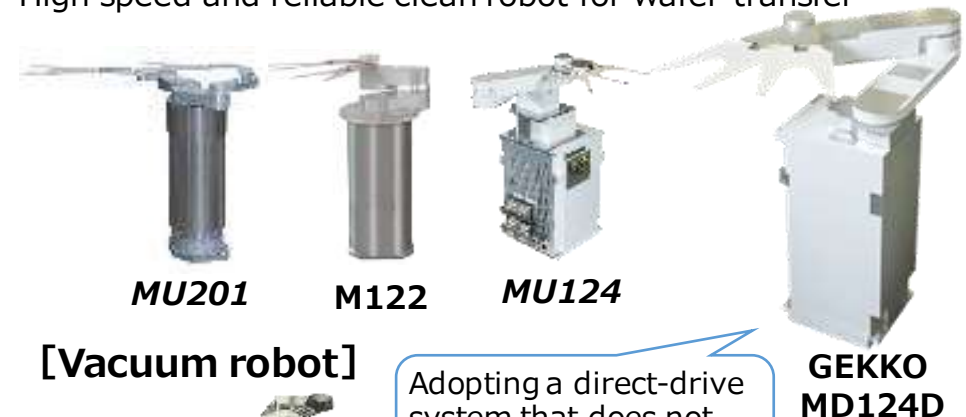

[Vacuum robot]



Industry's first adaptive robot MOTOMAN NEXT series



Aim

Automation of work processes that require human judgment, such as handling uncertain object conditions, shape and size variations, and tasks involving changes in work sequence or interruptions.

Features

① Autonomous control unit

Equipped with **an autonomous control unit** capable of environment perception, decision-making, **motion planning** based on sensor data, **and execution**.

② Optimal motor developed in-house

An optimal motor developed in-house is adopted to enhance its capability to follow commands from the controller (minimize the difference between the commanded position and the actual position).

③ Open platform

The development environment is opened up, so customers and partners utilize their know-how and technologies for robot applications.

Examples


Human-centered workplace, such as restaurant backyards



Heavy-duty workplace, such as logistics warehouses and airport unloading



Hazardous work, such as post-processing at medical sites

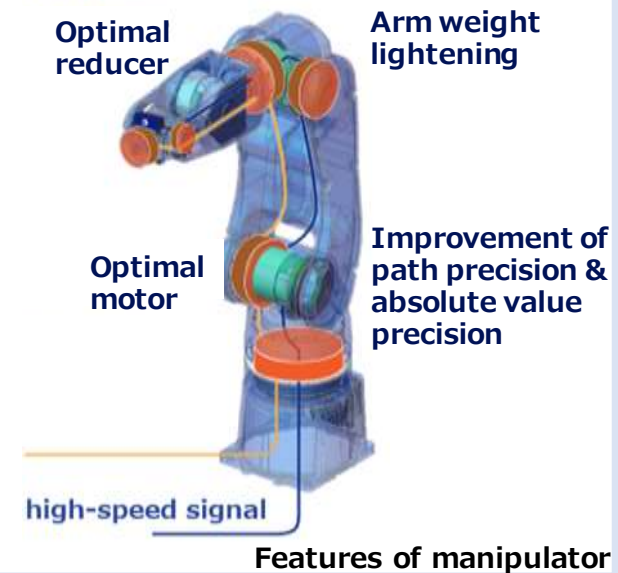

YASKAWA Cell Simulator

- An **engineering tool** that provides end-to-end support in a **digital twin environment**, from cell design and commissioning to system-wide validation, analysis, and redesign.
- It can build a digital twin with high accuracy using environmental data.

Features

① Cell engineering



From designing to system-wide validation all in one place in the virtual environment.

② Cell motion analysis

Analyzing the differences between a real environment and a virtual environment.

③ Cell replanning

Performing the same work as engineering in a real environment by using data from a real environment in a virtual environment.

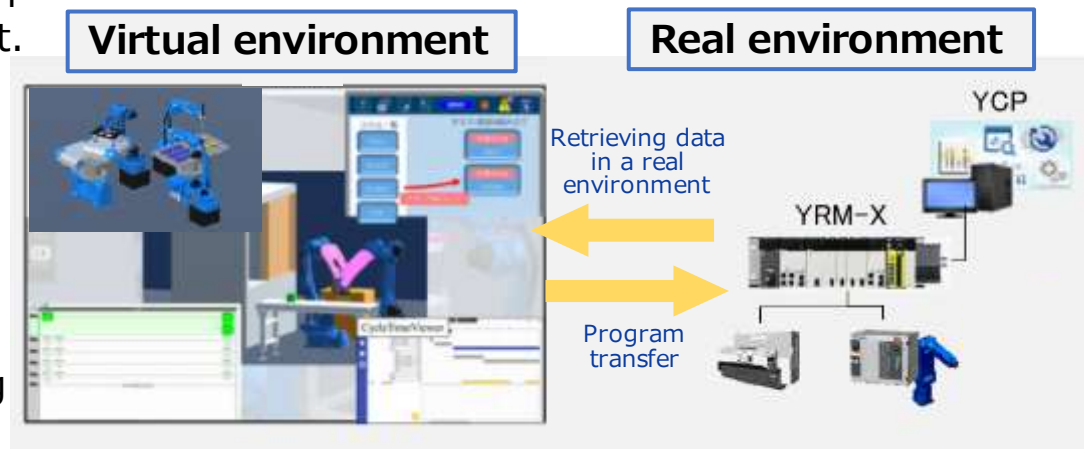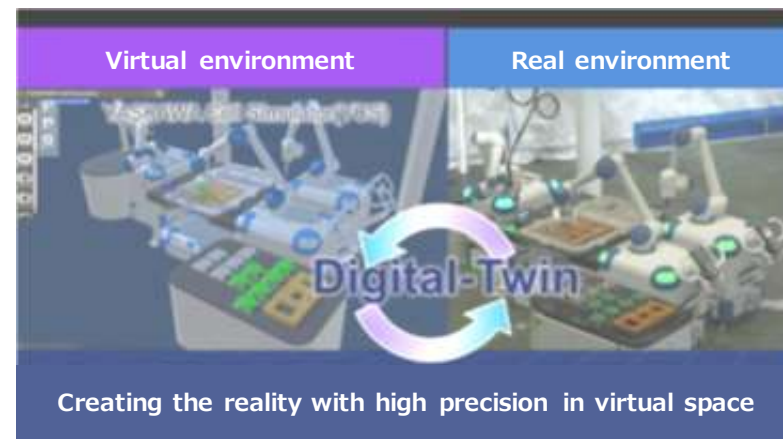

Food process automation

Automating solution for "labor shortage", "rising labor cost", and "countermeasures against contamination" in food industry

Automation for process required special skills

- Foreign matter contamination and sanitary
- Inline support for production



Sandwich bagging cell

Laborsaving for simple work


- Installation space similar to people
- Foreign matter contamination and sanitary
- Cells applicable to various processes



Topping cell

Artificial intelligence (AI)

Developing AI(Alliom) for manufacturing and industrial robots in the subsidiary, AI Cube Inc. Expansion of automation area in the FA field

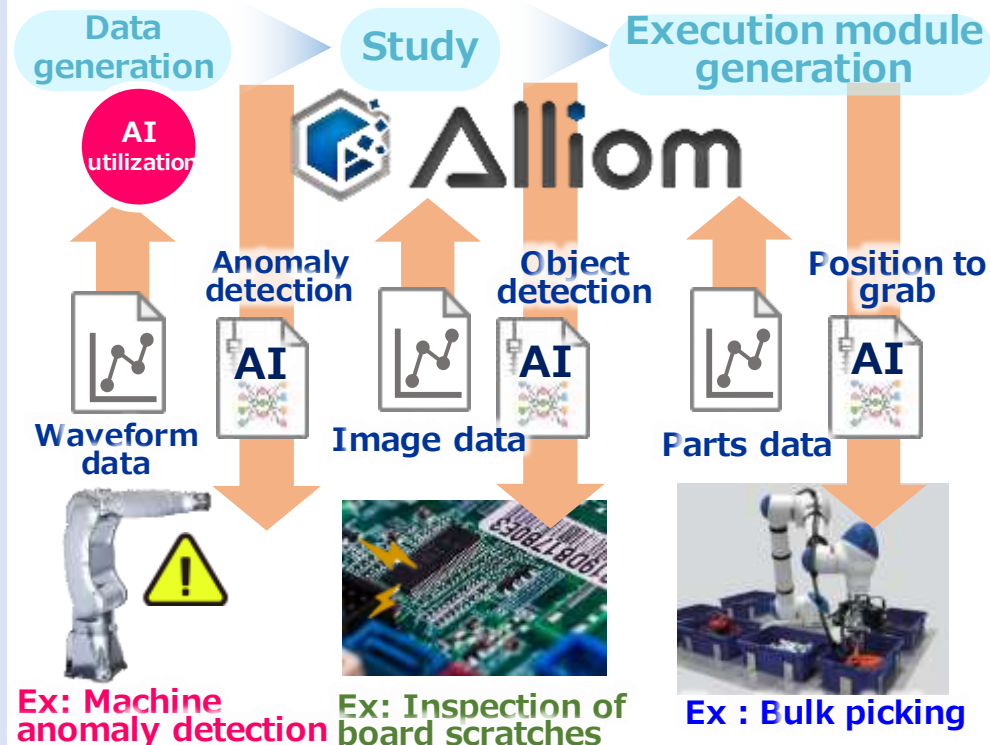

3. System Engineering

Notes :

- From FY2024, we have revised the segment classification of PV inverter to be included in Drives business. Figures for FY2023 are also presented based on the revised information.




Monitoring and control of water supply and sewerage systems




Supply of control systems and electrical products for continuous casting facilities

System Engineering Business

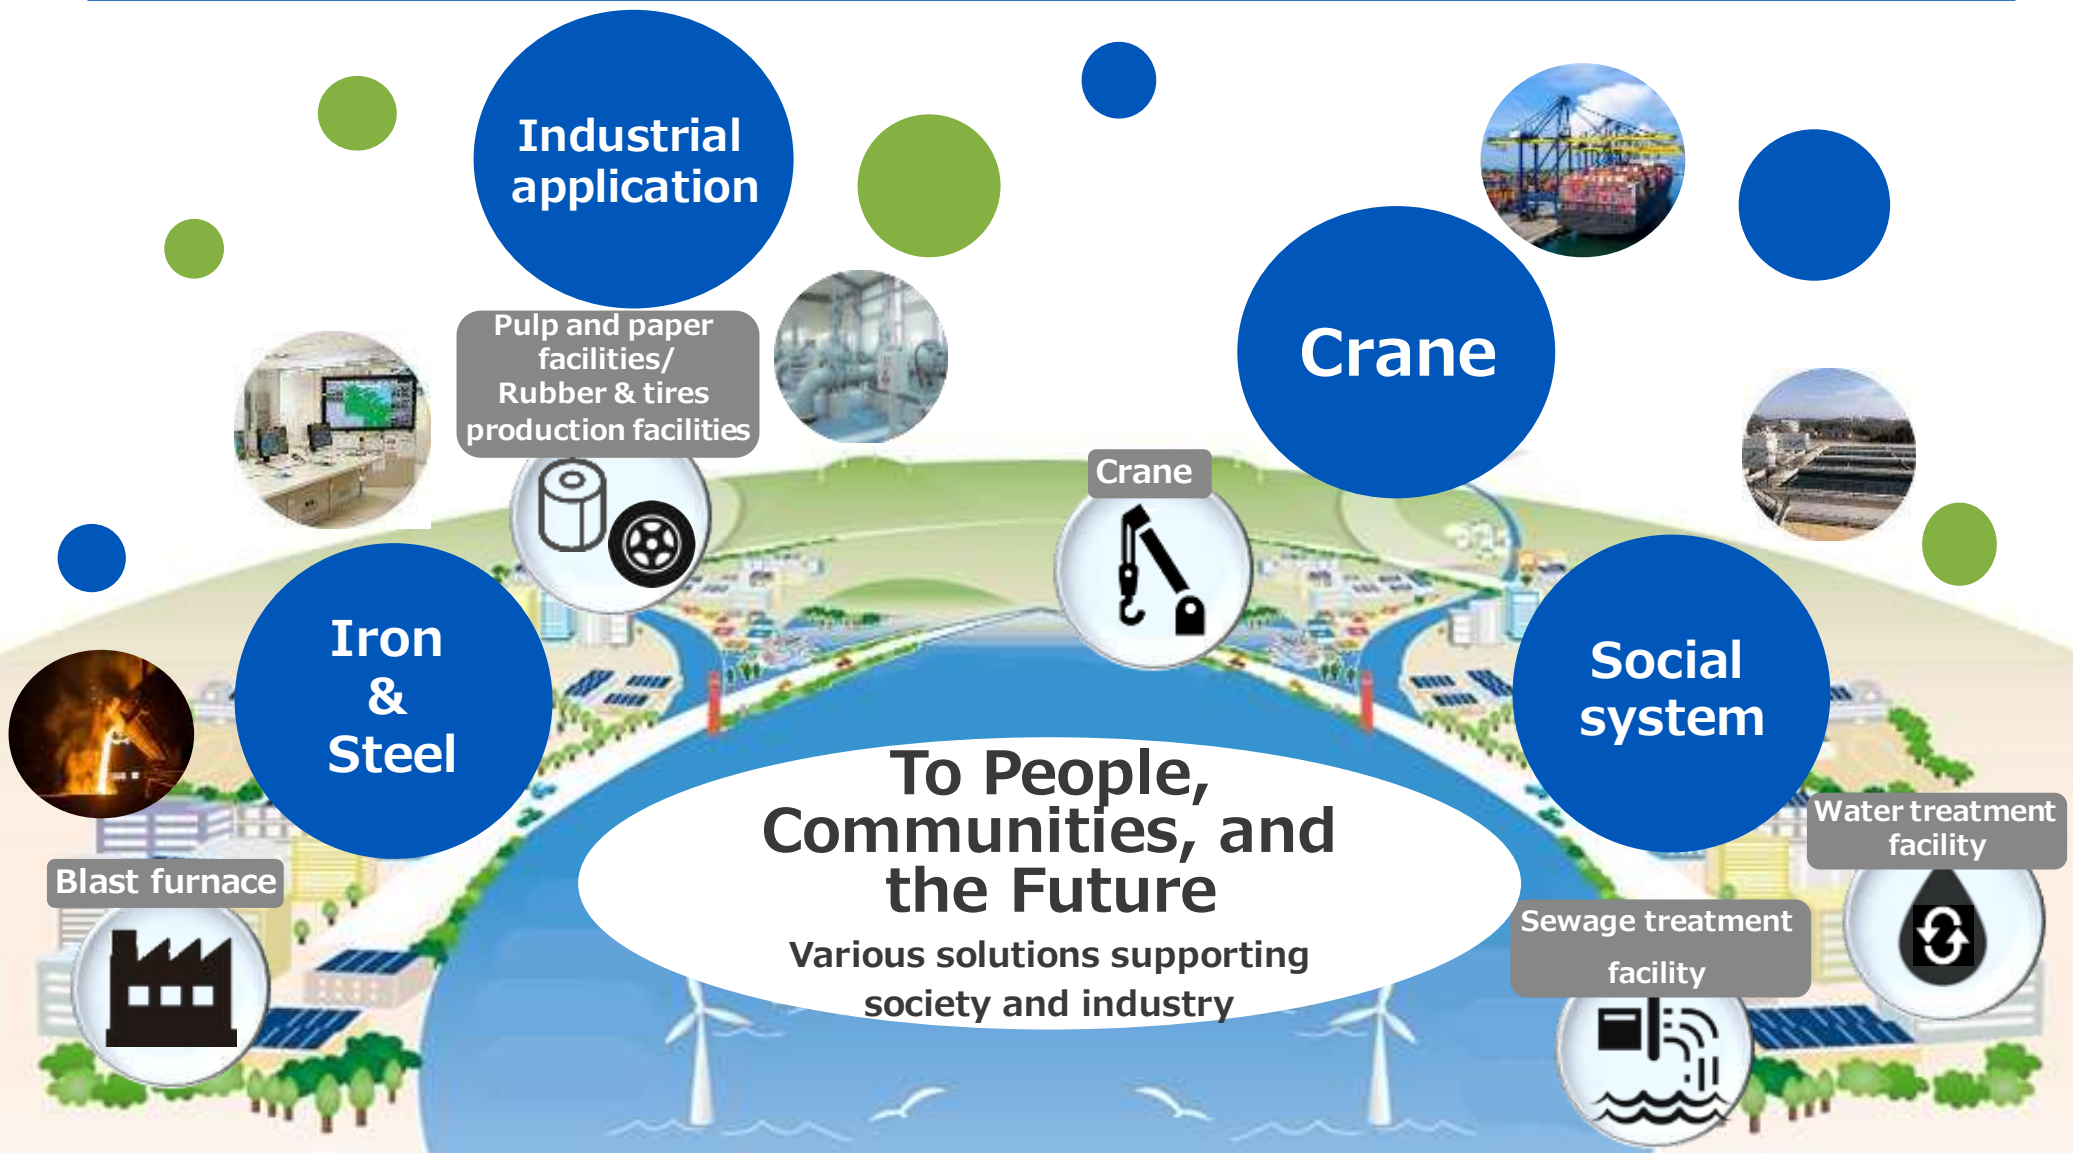

Revenue / Operating Profit (System Engineering)

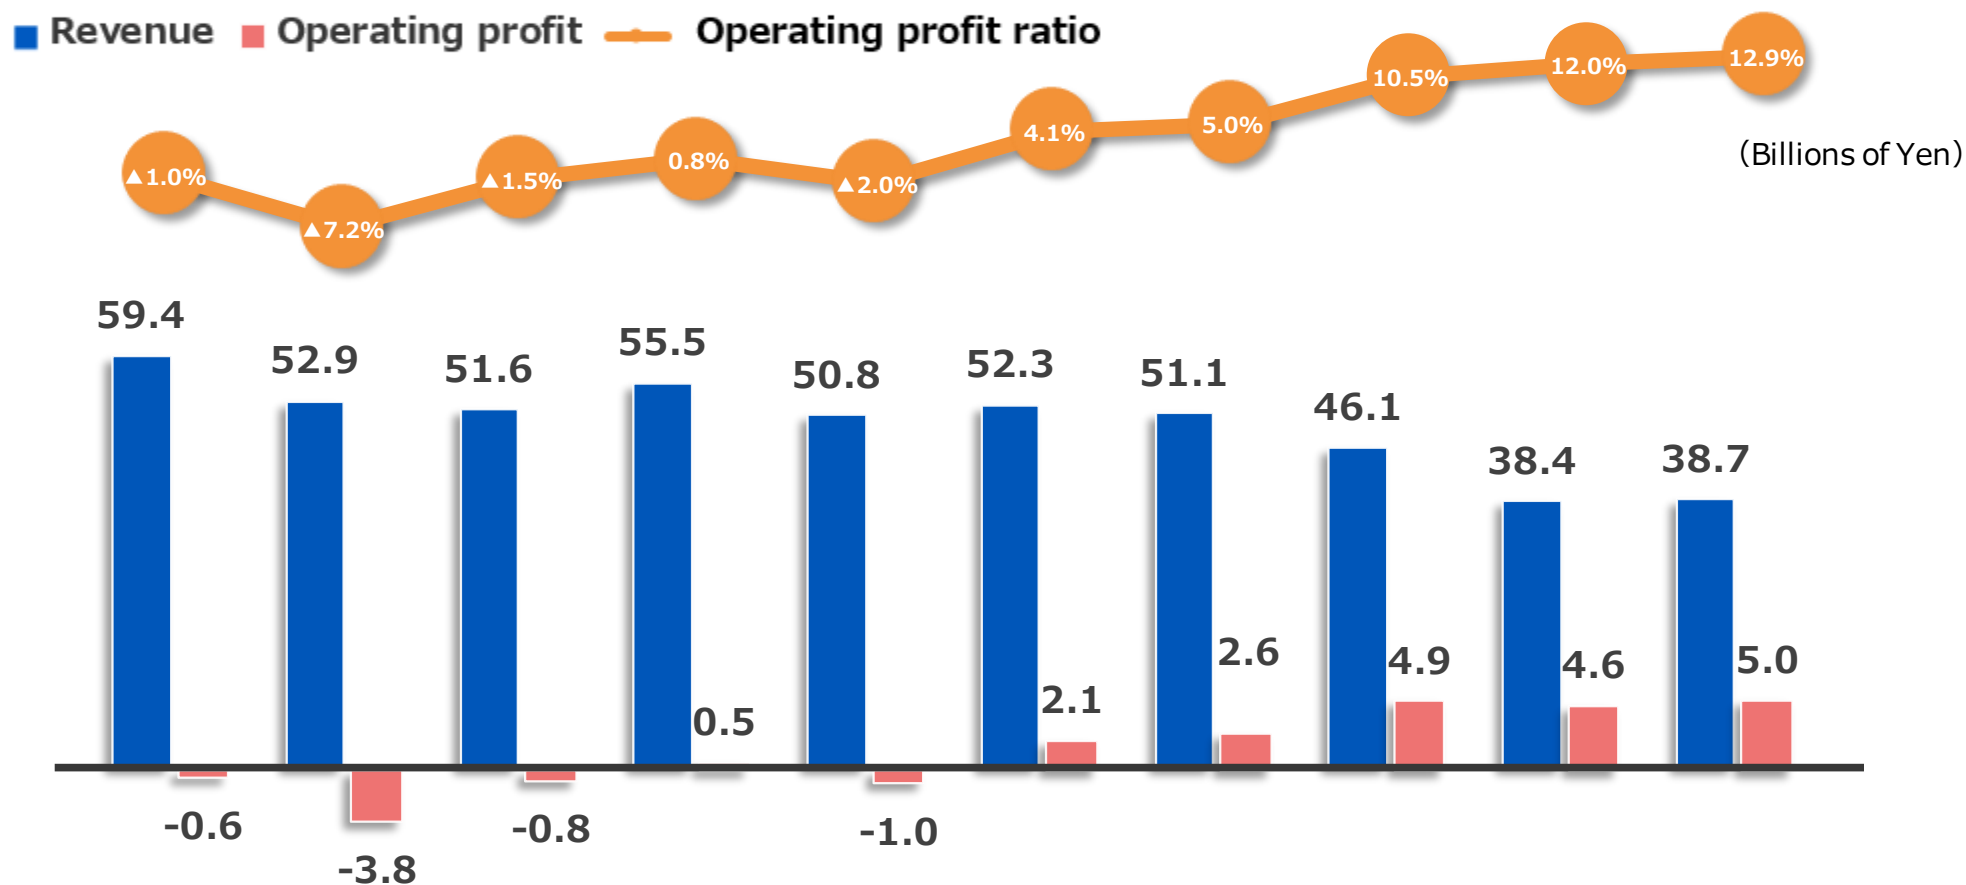

FY2016 FY2017 FY2018 FY2019 FY2020 FY2021 FY2022 FY2023 FY2024 FY2025

Note1: Data up to FY2017 are based on Japanese GAAP.


Note2: The Company changed its accounting period starting FY2017 from March 20 to the last day of February. As a transitional year for this change, FY2017 was from March 21, 2017 to February 28, 2018.

Note3: Revisions were made to the division of businesses segments starting FY2017. The PV inverter business, which was previously included in Motion Control, is included in System Engineering. Figures and profit ratios of each segment for FY2016 reflect this change. The change is not applied to figures and profit ratios for the period up until FY2015.


Note4: Revisions were made to the division of businesses segments starting FY2020. The high voltage AC drives, which was previously included in System Engineering, is included in Motion Control. Figures and profit ratios of each segment for FY2019 reflect this change. The change is not applied to figures and profit ratios for the period up until FY2018.

Revenue Breakdown by Region and Application, Market Share

Breakdown of revenue by region

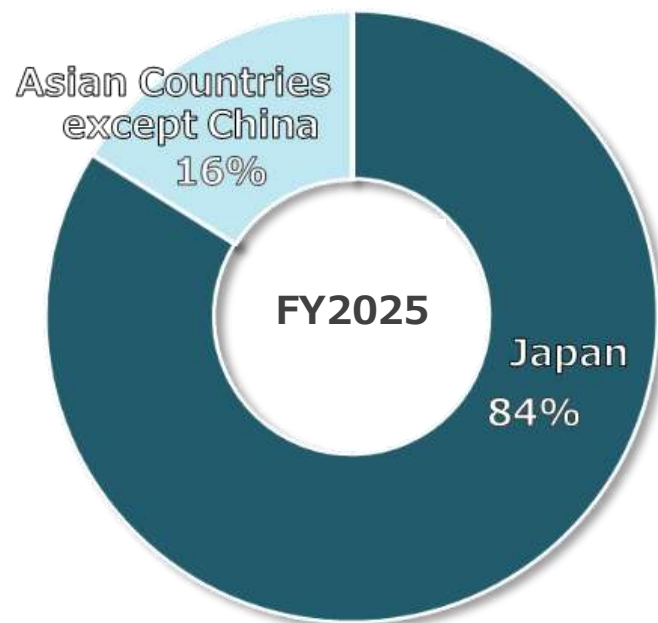


Revenue breakdown by application

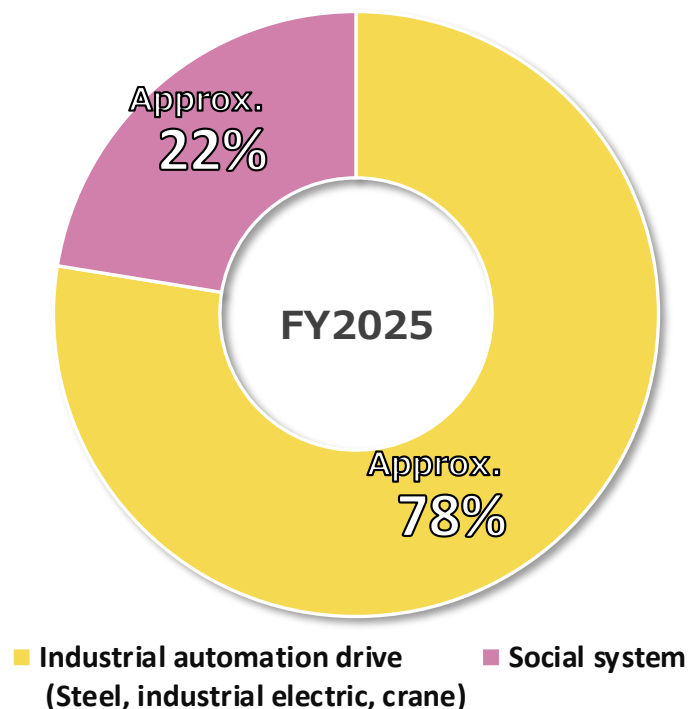

Market share

Steel plant systems
(Blast furnace)

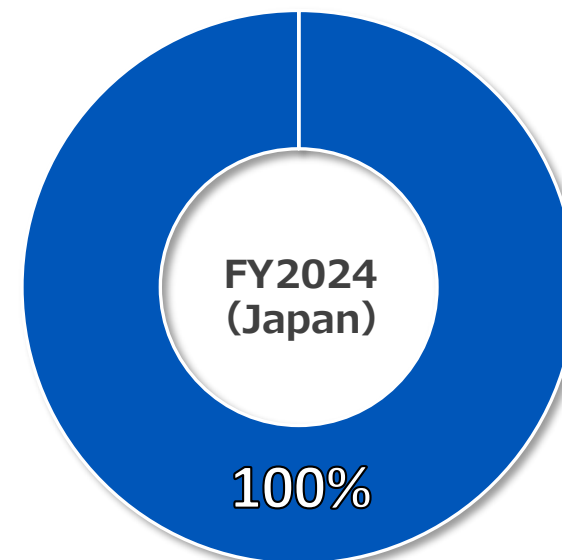

[Note] Company estimate

Social System Business

Yaskawa supports the advanced operating management and maintenance management of social infrastructure including water treatment plant.

Main target facilities

Water treatment facility



Sewerage treatment facility



Electric products for water supply and sewerage

Monitoring control



Human machine interface
CP-540

Power receiving and distribution
electricity self-generation



Medium-voltage
enclosed
switchboard

System controller
CP-3550



Centralized monitoring
& control facility



Centralized monitoring
& control facility



Iron & Steel Business

Contributing to stable continuous operation with high reliability by providing dedicated control systems and electrical equipment that meet the needs of various facilities in steel plants

Key process

Features of the equipment

Application features/Yaskawa strengths

Blast furnace



Blast furnace



Control room

- The process of making hot metal from iron ore
- Stable operation and long-term continuous operation under adverse environment are required.

- ① **100% share of raw material charging control in Japan**
- ② **Stable production** of consistent quality pig iron in response to changes in the operating environment
- ③ High-reliability products and system redundancy enable **long-term continuous operation**

Continuous casting



Continuous casting equipment

- Step of solidifying molten iron from a blast furnace
- Stable operation is essential because equipment shutdowns have a major impact on operations.

- ① **Domestic market share: 50% or more**
- ② System redundancy and reliability design for **stable operation**
- ③ Implement **backup control** to prevent internal coagulation in case of trouble.

Process / cold rolling



Process line equipment



Cold rolling mill

- Final process of steel manufacturing process
- Continuous processing of steel strips through surface treatment, heat treatment, and other processes.

- ① **High-precision, high-performance line control** leveraging years of accumulated control technology.
- ② High-precision control of steel strip speed, tension, and loop height using a drive system.
- ③ Large number of products delivered in Japan and overseas

Industrial Application Business

We contribute to the engineering in various industries, including pulp and paper, textiles, rubber and tires, film, metal processing, and plastics industries which we have a lot of experience and reliability, with our outstanding continuous drive technology.

System construction examples

Paper-making control system



Film manufacturing •
machining facility
control system



Equipment system for
synthetic fiber, carbon
fiber, and synthetic
leather



Container Crane Business

Since supplying Japan's first electrical equipment for container cranes in 1967, we have supported port operations through high reliability built on extensive experience and a proven track record, as well as a comprehensive after-sales service structure that meets every operational need in Japan and Southeast Asia.

Main features

- ◆ Developed an energy-saving, low-emission hybrid system, with several hundred units already delivered in Japan and abroad.
- ◆ Developing remote-control and operation-assist systems for cranes, with an eye toward the growing needs for safety, efficiency, and improved working conditions for operators in Asian ports.



Container crane

Related products



Crane-dedicated
AC drive
CR700



High-performance
vector-control AC drive
A1000



Integrated controller
CP-317M

YASKAWA